



MAXAM



TABLE OF CONTENTS:

OFF-THE-ROAD			pg#
Mobile Crane, Radial	MSV01	6	
	MS202	7	
E2/G2/L2, Radial	MS203	8	
E2/G2/L2, Bias	MS912	9	
	MS300	10	
E3/L3, Radial	MS301	11	
	MS302	12	
E3/L3, Bias	MS913	13	
	MS303	14	
	MS305	15	
E3 Scraper, Radial	MS306	16	
	MS306+	17	
	MS401	18	
	MS401+	19	
	MS402	20	
E4 Haulage, Radial	MS403	21	
	MS412	22	
	MS440	23	
	MS453	24	
	MS409	25	
E4/L4, Radial	MS405	26	
	MS406	27	
	MS501	28	
L5, Radial	MS502	29	
	MS503	30	
Loader, Solid	MS708	31	
CONSTRUCTION			pg#
Backhoe - Front 2WD, Bias	MS900	34	
	MS901	35	
	MS902	36	
Backhoe - Drive, Bias	MS903	37	
	MS904	38	
	MS906	39	
Skid Steer R4, Bias	MS916	40	
Skid Steer/Backhoe, Radial	MS918R	41	
Skid Steer/Backhoe L5, Bias	MS907	42	
	MS705	43	
	MS706	44	
Construction Pro	MS705 XD	45	
	MS709	46	
	MS905	47	
Telehandler/Grader, Bias	MS915	48	
Excavator, Bias	MS908	49	
Trencher	MS926	50	
Aerial Lift/Mini-Loader, Bias	MS909	51	
Multipurpose Radial	MS910R	52	
Paver, Bias	MS922	54	
Compactor, Bias	MS938	55	
INDUSTRIAL/PORT			pg#
Press-on Solid/Cushion	MS601+	58	
	MS701+	59	
Pneumatic Shaped Solid/Resilient	MS701 SM	60	
	MS702	61	
Ground Support, Solid	MS701 GSE	62	
Industrial, Bias	MS801	63	
Ground Support, Bias	MS802 GSE	64	
Terminal Trailer, Solid	MS707	65	
Port, Solid	MS703	66	
Port, Bias	MS803/MS804	67	
	MS307	68	
Port, Radial	MS407	69	
FORESTRY			pg#
Log Skidder LS2	MS930	72	
	MS931	73	
Forestry Flotation HF4	MS933	74	
CHARTS & WARRANTY			pg#
Load and Inflation Pressure Charts		76	
Load Index and Speed Symbol Charts		86	
Maxam OTR Tire Limited Warranty		87	





MAXAM
OTR TIRES



MAXAM MSV01

HIGHWAY SERVICE

For cranes operating in highway and off-the-road applications.

- F-speed rated (50mph/80kph)
- Low road noise and reduced vibration for improved operator comfort
- Excellent stability and handling response at highway speeds
- Deep tread grooves and traction lug pattern improve wet grip and off-road performance

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	50 mph 80 kph	
14.00R24 (385/95R24)	★★★	TT	10.00 W	54.3	15.3	29	130	13200	170F
				1379	389	23	900	6000	
14.00R25 (385/95R25)	★★★	TL	9.50/1.7 CR 10.00/1.5	54.3	15.3	29	130	13200	170F
				1379	389	23	900	6000	
16.00R25 (445/95R25)	★★★	TL	11.00/1.7 CR 11.25/2.0	58.9	17.5	33	130	14800	174F
				1495	444	26	900	6700	
20.5R25 (525/80R25)	★★★	TL	17.00/1.7 CR 17.00/2.0	58.7	21.1	37	102	16100	177F
				1490	535	30	700	7300	





MAXAM MS202

E2/G2/L2

For loaders, graders, telehandlers and articulated dump trucks operating in soft underfoot conditions. Ideal for use in dirt, mud, snow and ice.

- Siped block pattern for maximum traction
- Wear and cut resistant tread compound
- Self-cleaning tread with stone ejectors
- Approved for use in M+S (Mud and Snow) conditions

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	in	32nds	psi	5 mph	psi	30 mph	
				mm	mm	mm	KPa	10 kph	KPa	50 kph	
14.00R24	★	TL	10.00VA	53.5	15.3	29	80	15200	69	9100	175A2/157B
				1359	388	23	550	6900	475	4125	
17.5R25	★★	TL	14.00/1.5	52.7	17.7	35	94	18700	76	12000	182A2/167B
				1339	449	28	650	8500	525	5450	
20.5R25	★★	TL	17.00/2.0	58.7	20.3	37	94	25400	76	16100	193A2/177B
				1491	516	30	650	11500	525	7300	
23.5R25	★★	TL	19.50/2.5	63.5	23.5	41	94	32000	76	20400	201A2/185B
				1613	596	33	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	68.8	26.7	45	94	40800	76	25400	209A2/193B
				1748	679	36	650	18500	525	11500	
				in	in	32nds	psi	25 mph	psi	30 mph	
				mm	mm	mm	KPa	40 kph	KPa	50 kph	
16.00R24	★	TL	10.00VA	57.3	17.0	33	54	10200			161A8
				1455	431	27	375	4625			





MAXAM MS203

E2/G2/L2

Non-directional pattern designed to maximize traction in soft underfoot conditions. Ideal for use on graders, loaders and earthmovers.

- All-steel radial tire construction maximizes traction and flotation
- Wear and cut resistant tread compound
- Self-cleaning tread design

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
14.00R24	★	TL	10.00VA	54.0	14.8	32	80	15200	69	9100	175A2/157B
				1371	376	25	550	6900	475	4125	
17.5R25	★	TL	14.00/1.5	53.1	17.5	35	73	15700	54	9100	176A2/157B
				1348	445	28	500	7100	375	4125	
20.5R25	★	TL	17.00/2.0	58.5	20.5	39	73	20900	54	12300	186A2/168B
				1486	521	31	500	9500	375	5600	
23.5R25	★	TL	19.50/2.5	63.1	23.9	42	73	26800	54	15700	195A2/176B
				1603	607	33	500	12150	375	7100	





MAXAM MS912

BIAS E2/G2/L2

Aggressive R4 pattern designed to maximize traction in soft underfoot conditions. Ideal for use on graders, loaders and earthmovers.

- Heavy duty bias construction maximizes traction and flotation
- Wear and cut resistant tread compound
- Self-cleaning tread design

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	in	32nds	psi	5 mph	psi	30 mph	psi	25 mph	
				mm	mm	mm	KPa	10 kph	KPa	50 kph	KPa	40 kph	
15.5-25	12	TL	12.00/1.3	50.2	15.5	30	58	12300	36	7150	36	5840	149B/142A8/ 168A2
				1276	394	24	400	5600	250	3250	250	2650	
17.5-25	12	TL	14.00/1.5	53.1	17.3	31	51	13600	33	8050	29	6400	153B/145A8/ 171A2
				1350	439	25	350	6150	225	3650	200	2900	
	16			53.1	17.3	31	69	16100	44	9350	40	7400	158B/150A8/ 177A2
				1350	439	25	475	7300	300	4250	275	3350	
20.5-25	12	TL	17.00/2.0	58.3	20.9	35	36	14800	29	9900	25	7850	160B/152A8/ 174A2
				1482	530	28	250	6700	200	4500	175	3550	
	16			58.3	20.9	35	51	18200	40	12000	32	8800	167B/156A8/ 181A2
				1482	530	28	350	8250	275	5450	225	4000	





MAXAM MS300

E3/L3

Light duty E3/L3 lug pattern ideally suited to municipalities, small sand and aggregate operations as well as other smooth surface applications.

- Excellent traction in all off-road conditions
- Thick undertread for improved puncture resistance
- High quality casing allows for excellent retreadability
- Wear and cut resistant tread compound

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
15.5R25	★★	TL	12.00/1.3	50.2	15.3	29	94	15700	76	9900	176A2/160B
				1274	389	23	650	7100	525	4500	
17.5R25	★★	TL	14.00/1.5	53.0	17.3	31	94	18700	76	12000	182A2/167B
				1346	440	25	650	8500	525	5450	
20.5R25	★★	TL	17.00/2.0	58.4	20.6	34	94	25400	76	16100	193A2/177B
				1493	524	27	650	11500	525	7300	
23.5R25	★★	TL	19.50/2.5	63.2	23.7	38	94	32000	76	20400	201A2/185B
				1605	601	30	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	68.7	26.5	43	94	40800	76	25400	209A2/193B
				1739	669	34	650	18500	525	11500	
29.5R25	★★	TL	25.00/3.5	73.5	29.5	45	94	49400	76	30900	216A2/200B
				1866	751	36	650	22400	525	14000	





MAXAM MS301

E3/L3

Standard E3/L3 rock lug pattern combines excellent traction and high resistance to wear and cutting.

- Excellent traction in all off-road conditions
- Thick undertread for improved puncture resistance
- High quality casing allows for excellent retreadability
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear
- Increased net-to-gross for improved tread life

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
17.5R25	★★	TL	14.00/1.5	52.7	17.7	35	94	18700	76	12000	182A2/167B
				1339	449	28	650	8500	525	5450	
20.5R25	★★	TL	17.00/2.0	59.0	20.4	37	94	25400	76	16100	193A2/177B
				1499	517	30	650	11500	525	7300	
23.5R25	★★	TL	19.50/2.5	63.4	23.9	41	94	32000	76	20400	201A2/185B
				1611	608	33	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	68.8	26.7	45	94	40800	76	25400	209A2/193B
				1748	679	36	650	18500	525	11500	
29.5R25	★★	TL	25.00/3.5	74.3	30.0	48	94	49400	76	30900	216A2/200B
				1886	763	38	650	22400	525	14000	





MAXAM MS302

E3/L3

Heavy duty E3/L3+ lug pattern combines excellent traction and high resistance to wear and cutting. Specifically designed to minimize vibration at haul speeds and provides the lowest cost-per-hour.

- Excellent traction in all off-road conditions
- Thick undertread for improved puncture resistance
- High quality casing allows for excellent retreadability
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear
- Increased net-to-gross and tread depth for highest tread life
- Offset, reinforced lugs minimize vibration at haul speeds

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
20.5R25	★★	TL	17.00/2.0	58.8	20.5	42	94	25400	76	16100	193A2/177B
				1493	521	33	650	11500	525	7300	
23.5R25	★★	TL	19.50/2.5	63.5	23.6	47	94	32000	76	20400	201A2/185B
				1613	599	37	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	68.6	26.5	50	94	40800	76	25400	209A2/193B
				1742	672	40	650	18500	525	11500	
29.5R25	★★	TL	25.00/3.5	74.5	30.0	53	94	49400	76	30900	216A2/200B
				1893	763	42	650	22400	525	14000	
550/65R25	★	TL	17.00/2.0	53.1	21.5	44	69	18700	62	13900	182A2/172B
				1347	547	35	475	8500	425	6300	
650/65R25	★★	TL	19.50/2.5	58.2	25.0	46	91	30900	62	17600	200A2/180B
				1479	636	37	625	14000	425	8000	
750/65R25	★★	TL	24.00/3.0	63.3	29.4	52	91	40800	62	23400	209A2/190B
				1608	747	41	625	18500	425	10600	
775/65R29	★★	TL	25.00/3.5	68.5	30.5	57	91	45400	62	26800	213A2/195B
				1740	775	45	625	20600	425	12150	
875/65R29	★★	TL	27.00/3.5	73.4	33.5	60	91	56800	62	34200	221A2/203B
				1865	851	48	625	25750	425	15500	





MAXAM MS913

BIAS E3/L3

Standard E3/L3 rock lug pattern combines excellent traction and high resistance to wear and cutting.

- Excellent traction in all off-road conditions
- Thick undertread for improved puncture resistance
- Wear and cut resistant tread compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	in	32nds	psi	5 mph	psi	30 mph	
				mm	mm	mm	KPa	10 kph	KPa	50 kph	
15.5-25	12	TL	12.00/1.3	50.5 1283	15.6 395	30 24	58 400	12300 5600	36 250	7150 3250	168A2/149B
17.5-25	16	TL	14.00/1.5	52.8 1341	17.2 437	33 26	69 475	16100 7300	44 300	9350 4250	177A2/158B
	20			53.3 1354	17.9 456	33 26	83 575	18200 8250	58 400	11000 5000	181A2/164B
	20.5-25	16	TL	17.00/2.0	59.6 1514	20.7 527	37 29	51 350	18200 8250	40 275	12000 5450
20		58.8 1493			20.5 521	37 29	65 450	20900 9500	47 325	13200 6000	186A2/170B
23.5-25		16	TL	19.50/2.5	63.2 1605	23.9 607	43 34	44 300	20900 9500	33 225	13600 6150
	20	63.4 1611			22.9 583	43 34	54 375	24000 10900	44 300	16100 7300	191A2/179B
	28	63.7 1617			23.5 597	43 34	80 550	30000 13600	58 400	19300 8750	199A2/183B
		20			68.9 1750	26.5 673	44 35	51 350	29100 13200	36 250	18200 8250
26.5-25	24	TL	22.00/3.0	68.9 1750	26.5 673	44 35	58 400	30900 14000	44 300	20400 9250	200A2/185B
	28			68.9 1750	26.5 673	44 35	69 475	34200 15500	51 350	22000 10000	203A2/188B
				28	68.9 1750	26.5 673	44 35	69 475	34200 15500	51 350	





MAXAM MS303

E3

A high traction E3 pattern for use in scraper applications.

- Excellent traction in soft, wet and rocky conditions
- Reinforced shoulder and sidewall for improved cut resistance
- High strength bead designed to minimize wheel indexing at high torque
- Wear and cut resistant tread compound
- Self-cleaning tread ensures maximum traction in soft, wet and rocky conditions

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	30 mph 50 kph	
33.25R29	★★	TL	27.00/3.5	82.3	33.9	55	76	40800	209B
				2090	860	44	525	18500	
37.25R35	★★	TL	31.00/4.0	94.1	37.2	75	76	52000	218B
				2389	946	60	525	23600	





MAXAM MS305

E3

A high traction E3 pattern for use in dump truck applications.

- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- Reinforced all-steel radial casing provides superior loading performance
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	30 mph 50 kph	psi KPa	5 mph 10 kph	
13.00R25	★★★	TT	8.50/1.3	50.9	13.2	31	102	10700	138	18700	163B/182A2
			10.00W	1292	336	25	700	4875	950	8500	
14.00R24	★★★	TT	10.00W	53.5	14.4	34	102	12800	138	22000	169B/188A2
			8.5/1.3	1359	365	27	700	5800	950	10000	
14.00R25	★★★	TT	10.00/2.0	53.5	14.4	34	102	12800	138	22000	169B/188A2
			8.5/1.3	1359	365	27	700	5800	950	10000	





MAXAM MS306

E3

A high traction E3 pattern for use in dump truck applications.

- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- Reinforced all-steel radial casing provides superior loading performance
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	30 mph 50 kph	psi KPa	5 mph 10 kph	
13.00R25	★★★	TT	8.50/1.3	51.2	13.2	31	102	10700	138	18700	
			10.00W	1300	336	25	700	4875	950	8500	163B/182A2
14.00R24	★★★	TT	10.00W	53.5	14.4	34	102	12800	138	22000	169B/188A2
			8.5/1.3	1359	365	27	700	5800	950	10000	
14.00R25	★★★	TT	10.00/2.0	53.5	14.4	34	102	12800	138	22000	169B/188A2
			8.5/1.3	1359	365	27	700	5800	950	10000	
16.00R25	★★★	TT	11.25/2.5	58.5	17.1	35	102	16100	138	26800	177B/195A2
			8.5/1.3	1487	433	28	700	7300	950	12150	





MAXAM MS306+

E3

A high traction E3 pattern for use in dump truck applications.

- Increased tread depth allows for longer tread life
- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- Reinforced all-steel radial casing provides superior loading performance
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	30 mph 50 kph	psi KPa	5 mph 10 kph	
16.00R25	★★★	TT/TL	11.25/2.5	58.8 1493	17.0 432	39 31	102 700	16100 7300	138 950	26800 12150	177B/195A2





MAXAM MS401

E4

Deep grooved tread design provides excellent traction in rigid dump truck applications. Ideal for applications requiring maximum road grip and high site TKPH/TMPH.

- Excellent traction in all off-road conditions
- Deep tread grooves provide cooler running tread for high site TKPH/TMPH
- Wide, square footprint distributes load for minimal haul road disturbance
- Reinforced bead, shoulder and sidewall for increased cut resistance
- Heat resistant undertread reduces tire temperature
- Multiple tread compound options target specific site requirements

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/ TKPH	Infl. P.	L.C.C. (lbs/ kg)	L.I.
				in mm	in mm	32nds mm			psi kPa	30 mph 50 kph	
12.00R24	★★★	TT / TL	8.50V	49.3 1251	12.0 305	40 32	Standard	- -	130 900	9900 4500	160F
14.00R24	★★★	TT	10.00W	55.1 1400	15.6 395	45 36	Standard Cut Resistant	82/120 62/91	109 750	12800 5800	169B
14.00R25	★★★	TT / TL	10.00/1.5	55.1 1400	15.6 395	45 36	Standard Cut Resistant	82/120 62/91	109 750	12800 5800	169B
18.00R25	★★	TL	13.00/2.5	65.7 1669	19.4 494	62 49	Standard Cut Resistant	- -	102 700	20400 9250	185B
18.00R33	★★	TL	13.00/2.5	73.6 1876	19.6 497	66 52	Standard Cut Resistant Heat Resistant	146/213 118/173 171/249	102 700	24000 10900	191B
21.00R33	★★	TL	15.00/3.0	78.0 1982	21.8 554	77 61	Standard Cut Resistant Heat Resistant	187/273 151/221 218/318	102 700	30900 14000	200B
21.00R35	★★	TL	15.00/3.0	80.7 2050	23.0 584	74 58	Standard Cut Resistant Heat Resistant	187/273 151/221 218/318	102 700	32000 14500	201B
24.00R35	★★	TL	17.00/3.5	85.8 2180	26.1 664	83 65	Standard Cut Resistant Heat Resistant	247/361 200/292 288/421	102 700	40800 18500	209B
27.00R49	★★	TL	19.50/4.0	106.7 2710	28.9 734	88 71	Standard Ultra Cut Resistant Cut Resistant	319/465 257/375 -	102 700	60000 27250	223B
								429/627			





MAXAM

MS401+

E4

Deep grooved tread design provides excellent traction in rigid dump truck applications. Enhanced casing and sizing optimized for high load, dual-mounted mining and logging trucks.

- Excellent traction in all off road conditions
- Reinforced bead, shoulder, and sidewall for increased cut resistance
- Heat resistant undertread reduces tire temperature
- Strengthened casing allows for higher load carrying capacity

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/ TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.	
				in	in	32nds			psi	30 mph		
				mm	mm	mm			KPa	50 kph		
27.00R49	★★	TL	19.50/4.0	107.0	28.9	81.0	Standard	343/500	102	60000	223B	
							Ultra Cut Resistant	240/350				
				2719	734	102	Cut Resistant	298/435	700	27250		
							Heat Resistant	398/580				





MAXAM MS402

E4

Deep grooved shoulder lugs and solid center bar provides exceptional traction and maximum tread life in rigid dump truck applications.

- Excellent traction on maintained haul roads
- Solid tread centerline minimizes vibration and increases tread life
- Wide, square footprint distributes load for minimal haul road disturbance
- Reinforced bead, shoulder and sidewall for increased cut resistance
- Heat resistant undertread reduces tire temperature
- Multiple tread compound options target specific site requirements

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	in	32nds			psi	30 mph	
				mm	mm	mm			KPa	50 kph	
18.00R33	★★	TL	13.00/2.5	73.6	19.6	66	Standard	145/212	102	24000	191B
				1869	497	52	Cut Resistant	116/169	700	10900	
24.00R35	★★	TL	17.00/3.5	85.9	26.0	71	Standard	226/330	102	40800	209B
				2183	661	56	Cut Resistant	182/265	700	18500	
							Heat Resistant	264/386			
27.00R49	★★	TL	19.50/4.0	106.4	29.0	82	Standard	291/425	102	60000	223B
				2703	737	65	Ultra Cut Resistant	233/340	-	-	
							Cut Resistant	-	700	27250	
							Heat Resistant	394/575			
30.00R51	★★	TL	22.00/4.5	114.2	33.9	93	Standard	393/574	102	74000	230B
				2901	860	74	Ultra Cut Resistant	271/395	-	-	
							Cut Resistant	322/470	700	33500	
							Heat Resistant	460/671			





MAXAM MS403

E4

A versatile tread design allows flexibility in applications from smooth haul roads to rough and rocky terrain while providing maximum productivity.

- Excellent traction in all haul road conditions
- Deep tread grooves provide cooler running tread for high site TKPH/TMPH
- E4+ deep tread for longest tire life
- Wide, square footprint distributes load for minimal haul road disturbance
- Reinforced bead, shoulder and sidewall for increased cut resistance
- Heat resistant undertread reduces tire temperature
- Multiple tread compound options target specific site requirements

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/ TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm					
27.00R49	★★	TL	19.50/4.0	106.7	28.9	94	Standard	346/505	102	60000	223B
							Ultra Cut Resistant	232/338			
				2710	734	75	Cut Resistant	281/410	700	27250	
							Heat Resistant	404/590			
33.00R51	★★	TL	24.00/5.0	120.7	35.9	105	Standard	408/595	102	85500	235B
							Ultra Cut Resistant	272/397			
				3066	912	84	Cut Resistant	324/473	700	38750	
							Heat Resistant	549/802			
36.00R51	★★	TL	26.00/5.0	126.3	39.7	117	Standard	493/720	102	102000	241B
							Cut Resistant	418/610	700	46250	
				3209	1008	93	Heat Resistant	569/830			
40.00R57	★★	TL	29.00/6.0	139.7	44.1	117	Standard	599/875	102	132500	250B
							Cut Resistant	500/730	700	60000	
				3548	1120	93	Heat Resistant	714/1042			
50/80R57	★★	TL	32.00/6.0	141.5	48.4	120	Standard	622/908	102	161000	257B
							Cut Resistant	529/772	700	73000	
				3593	1230	95	Heat Resistant	728/1062			
59/80R63	★★	TL	-	-	-	-	-	-	-	-	-





MAXAM

MS412

E4

A versatile tread design allows flexibility in applications from smooth haul roads to rough and rocky terrain while providing maximum productivity.

- Excellent traction in all haul road conditions
- Deep tread grooves provide cooler running tread for high site TKPH/TMPH

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	in	32nds			psi	30 mph	
				mm	mm	mm			KPa	50 kph	
27.00R49	★★	TL	19.50/4.0	106.4	29.0	82	Standard	-	102	60000	223B
							Ultra Cut Resistant	-			
				2703	737	65	Cut Resistant	-	700	27250	
							Heat Resistant	-			





MAXAM

MS440

E4

A versatile tread design allows flexibility in applications from smooth haul roads to rough and rocky terrain while providing maximum productivity.

- Excellent traction in all haul road conditions
- Deep tread grooves provide cooler running tread for high site TKPH/TMPH
- E4+ deep tread for longest tire life
- Wide, square footprint distributes load for minimal haul road disturbance
- Reinforced bead, shoulder and sidewall for increased cut resistance
- Heat resistant undertread reduces tire temperature
- Multiple tread compound options target specific site requirements

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm			psi KPa	30 mph 50 kph	
37.00R57	★★	TL	27.00/6.0	135.4	40.0	117	Standard	551/805	102	113500	245B
				3439	1016	93	Cut Resistant	452/660	700	51500	
							Heat Resistant	665/971			
46/90R57	★★	TL	32.00/6.0	141.5	46.0	117	Standard	603/880	102	139000	252B
				3594	1168	93	Cut Resistant	507/740	700	63000	
							Heat Resistant	712/1040			





MAXAM MS453

E4

A rugged and aggressive tread design that allows maximum tire life for the most demanding mining application.

- New reinforced sidewall, robust bead construction and enhanced tread belts to provide maximum protection and performance
- Highly engineered tread pattern designed to provide maximum resistance to severe conditions
- Deep tread depth delivers longer tire life and lower cost-per-hour
- Heat resistant undertread reduces tire temperature, increasing the tire's TKPH/TMPH
- Multiple tread compound options target specific site requirements

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Tread Compound	TMPH/ TKPH	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm			psi KPa	30 mph 50 kph	
53/80R63	★★	TL	36.00/5.0	150.7	51.3	138	Standard	683/997	102	182000	261B
				3828	1303	110	Cut Resistant	578/844	700	82500	
							Heat Resistant	836/1220			





MAXAM MS409

E4

A high traction E4 pattern for use in dump truck applications.

- Deep tread depth allows for longer tread life
- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- Reinforced all-steel radial casing provides superior loading performance
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
14.00R25	★★★	TT	10.00/2.0	54.1	14.5	43	102	12800	138	22000	169B/188A2
			8.5/1.3	1373	368	34	700	5800	950	10000	





MAXAM MS405

DUMPXTRA E4/L4

Deep E4/L4 lug pattern combines excellent traction and high resistance to wear and cutting. Specifically designed to minimize vibration at haul speeds and provide the lowest cost-per-hour.

- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- High quality casing allows for excellent retreadability
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
23.5R25	★★	TL	19.50/2.5	63.9	24.0	68	94	32000	76	20400	201A2/185B
				1623	609	54	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	69.5	26.7	75	94	40800	76	25400	209A2/193B
				1765	679	60	650	18500	525	11500	
29.5R25	★★	TL	25.00/3.5	73.7	29.7	79	94	49400	76	30900	216A2/200B
				1872	755	63	650	22400	525	14000	
875/65R29	★★	TL	27.00/3.5	73.5	34.1	75	91	56800	62	34200	221A2/203B
				1866	866	60	625	25750	425	15500	
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph			
875/65R29	★★★	TL	27.00/3.5	73.6	34.0	75	116	68000	-	-	227A2
				1868	864	60	800	30750	-	-	





MAXAM MS406

E4/L4

Deep E4/L4 lug pattern combines excellent traction and high resistance to wear and cutting. Specifically designed to maximize traction in loader applications and provide the lowest cost-per-hour.

- Excellent traction in all off-road conditions
- Deep undertread for improved puncture resistance
- High quality casing allows for excellent retreadability
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	psi KPa	30 mph 50 kph	
23.5R25	★★	TL	19.50/2.5	64.8	23.6	66	94	32000	76	20400	201A2/185B
				1645	601	52	650	14500	525	9250	
26.5R25	★★	TL	22.00/3.0	68.3	26.1	71	94	40800	76	25400	209A2/193B
				1736	662	56	650	18500	525	11500	
29.5R25	★★	TL	25.00/3.5	74.9	29.7	76	94	49400	76	30900	216A2/200B
				1903	755	60	650	22400	525	14000	
29.5R29	★★	TL	25.00/3.5	78.9	30.2	76	94	52000	76	33100	218A2/202B
				2005	766	60	650	23600	525	15000	
35/65R33	★★	TL	28.00/3.5	81.3	34.5	79	94	61500	76	38600	224A2/207B
				2066	877	63	650	28000	525	17500	
				in mm	in mm	32nds mm	psi KPa	25 mph 40 kph			
35/65R33	★★★★	TL	28.00/3.5	81.3	34.5	83	116	64000	-	-	225A8
				2066	877	66	800	29000	-	-	





MAXAM MS501

MINEXTRA - L5

For use in the most severe applications where traction and long tread life are required.

- Specialized mining compound for increased cut and impact resistance
- Extra deep L5 offset lug pattern combines excellent traction and high resistance to wear in all off-road conditions
- Deep undertread for improved puncture resistance
- Reinforced bead, shoulder and sidewall for increased cut resistance

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	
17.5R25	★★	TL	14.00/1.5	55.4	17.0	81	94	18700	182A2
				1408	433	64	650	8500	
20.5R25	★★	TL	17.00/2.0	60.9	20.9	90	94	25400	193A2
				1547	532	72	650	11500	
23.5R25	★★	TL	19.50/2.5	65.4	23.9	101	94	32000	201A2
				1662	608	80	650	14500	
26.5R25	★★	TL	22.00/3.0	70.7	26.6	110	94	40800	209A2
				1796	675	87	650	18500	
29.5R25	★★	TL	25.00/3.5	75.9	30.4	117	94	49400	216A2
				1928	772	93	650	22400	
29.5R29	★★	TL	25.00/3.5	79.2	30.7	123	94	52000	218A2
				2011	779	98	650	23600	
35/65R33	★★	TL	28.00/3.5	81.4	34.9	120	94	61500	224A2
				2068	886	95	650	28000	
26.5R25	★★★	TL	22.00/3.0	70.7	26.6	110	116	46700	214A2
				1796	675	87	800	21200	
35/65R33	★★★	TL	28.00/3.5	81.4	34.9	120	116	71500	229A2
				2068	886	95	800	32500	



MAXAM MS502

MINEXTRA - L5S

For equipment operating in highly abrasive material environments where maximum protection from penetrations and cuts is needed.

- Extra deep L5S design provides the highest resistance to wear and cutting, improving tire life and lowering operating cost
- Deep undertread for improved puncture resistance
- Reinforced bead, shoulder and sidewall for increased cut resistance
- Specialized mining compound for increased cut and impact resistance

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	
12.00R24	★★	TT	8.50V	50.0 1270	12.3 312	70 56	120 825	15200 6900	175A2
18.00R25	★★	TL	13.00/2.5	66.0 1677	17.0 433	106 84	120 825	35300 16000	204A2
17.5R25	★★	TL	14.00/1.5	55.4 1408	19.7 500	91 72	94 650	18700 8500	182A2
20.5R25	★★	TL	17.00/2.0	60.9 1547	20.9 532	91 72	94 650	25400 11500	193A2
23.5R25	★★	TL	19.50/2.5	65.6 1666	23.8 605	108 86	94 650	32000 14500	201A2
26.5R25	★★	TL	22.00/3.0	70.7 1796	26.6 675	121 96	94 650	40800 18500	209A2
29.5R25	★★	TL	25.00/3.5	75.9 1928	30.4 772	131 104	94 650	49400 22400	216A2
29.5R29	★★	TL	25.00/3.5	79.2 2011	30.8 783	132 105	94 650	52000 23600	218A2
18.00R25	★★★	TL	13.00/2.5	66.0 1677	19.7 500	107 85	130 900	37500 17000	206A2
26.5R25	★★★	TL	22.00/3.0	70.7 1796	26.6 675	121 96	116 800	46700 21200	214A2
29.5R29	★★★	TL	25.00/3.5	79.2 2011	30.8 783	132 105	116 800	60000 27250	223A2



MAXAM MS503

L5T

Extra deep, open lug L5 traction pattern combines excellent traction and high resistance to wear and cutting. Specifically designed to maximize service life in the harshest applications.

- Excellent traction in all off-road conditions
- Staggered tread blocks provide continuous ground contact for improved ride comfort
- Reinforced bead, shoulder and sidewall construction
- Squared shoulder design and wide footprint maximizes stability
- Stone and mud ejectors prevent debris buildup between lugs

Applications:



Size	Rating	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	
17.5R25	★★	TL	14.00/1.5	55.4	17.0	79	94	18700	182A2
				1408	433	63	650	8500	
20.5R25	★★	TL	17.00/2.0	60.9	20.9	91	94	25400	193A2
				1547	532	72	650	11500	
23.5R25	★★	TL	19.50/2.5	65.7	24.0	102	94	32000	201A2
				1668	610	81	650	14500	
26.5R25	★★	TL	22.00/3.0	70.7	26.6	109	94	40800	209A2
				1796	675	87	650	18500	
29.5R25	★★	TL	25.00/3.5	75.2	30.4	117	94	49400	216A2
				1910	772	93	650	22400	
29.5R29	★★	TL	25.00/3.5	78.2	30.7	126	94	52000	218A2
				1987	780	100	650	23600	
875/65R29	★★	TL	27.00/3.5	75.7	34.1	118	91	56800	221A2
				1922	866	94	625	25750	
35/65R33	★★	TL	28.00/3.5	81.4	34.9	125	94	61500	224A2
				2068	886	99	650	28000	



MAXAM

MS708

OTR PRO

Applications:



Premium 3-stage solid OTR loader tire. Ideal for the most extreme OTR and construction applications. Extra deep tread allows for 3 to 5 times longer tire life vs pneumatic. Mounts on standard multi-piece earthmover rims.

- 3-stage, 100% rubber construction:
 - Ultra cut & wear resistant tread compound
 - Heat resistant cushion center compound
 - Pure rubber base compound
 - Internal hexagonal bead rings eliminate wheel slip
- Zero maintenance solid construction:
 - No flats due to punctures or sidewall damage
 - No routine air pressure checks

- Self-cleaning R4 tread pattern designed for maximum chunk resistance
- Aperture (AP) sidewall configuration designed to provide soft ride
- Smooth tread available to maximize tire life

Size	Tread	Sidewall	Rim	O.D.	S.W.	T.D.	L.C.C. (lbs/kg)		L.I.
				in	in	in	5 mph	10 mph	
				mm	mm	mm	10 kph	15 kph	
17.5-25	SM	ST	14.00	53.0	17.8	6.1	24700	17890	192A2
				1346	452	155	11200	8100	
	AP		53.0	17.8	6.1	22230	16100	188A2	
		1346	452	155	10090	7300			
	TR	ST	14.00	53.0	17.8	6.1	24700	17890	192A2
				1346	452	155	11200	8100	
20.5-25	SM	AP	17.00	53.0	17.8	6.1	22230	16100	188A2
				1346	452	155	10090	7300	
	TR	ST	17.00	58.8	20.8	7.4	35300	25570	204A2
				1493	528	188	16010	11600	
	AP		58.8	20.8	7.4	30900	22380	200A2	
		1493	528	188	14020	10150			
23.5-25	SM	ST	19.50	64.0	23.5	8.6	44100	31950	212A2
				1625	597	218	20000	14500	
	AP		64.0	23.5	8.6	39700	28760	208A2	
		1625	597	218	18000	13050			
	TR	ST	19.50	64.0	23.5	8.6	44100	31950	212A2
				1625	597	218	20000	14500	
26.5-25	SM	AP	22.00	64.0	23.5	8.6	39700	28760	208A2
				1625	597	218	18000	13050	
	TR	ST	22.00	68.4	27.0	9.5	53600	38830	219A2
				1737	686	241	24300	17600	
	AP		68.4	27.0	9.5	48100	34840	215A2	
		1737	686	241	21800	15800			
29.5-25	SM	ST	25.00	68.4	27.0	9.5	53600	38830	219A2
				1737	686	241	24300	17600	
	AP		68.4	27.0	9.5	48100	34840	215A2	
		1737	686	241	21800	15800			
	TR	ST	25.00	73.0	29.7	10.4	66000	47810	226A2
				1854	754	264	30000	21700	
18.00-25	SM	AP	13.00/2.5	73.0	29.7	10.4	58400	42305	222A2
				1854	754	264	26500	19190	
	TR	ST	25.00	73.0	29.7	10.4	66000	47810	226A2
				1854	754	264	30000	21700	
	AP		73.0	29.7	10.4	58400	42305	222A2	
		1854	754	264	26500	19190			
30/75-29	SM	ST	25.00/3.5	64.0	19.0	8.6	38580	27950	207A2
				1625	483	218	17500	12680	
	AP		64.0	19.0	8.6	34170	24760	203A2	
		1625	483	218	15500	11230			
	TR	ST	25.00/3.5	75.0	30.6	10.5	69450	50310	228A2
				1905	777	266	31500	22820	
30/75-29	SM	AP	25.00/3.5	75.0	30.6	10.5	61730	44710	224A2
				1905	777	266	28000	20280	
	TR	ST	25.00/3.5	75.0	30.6	10.5	69450	50310	228A2
				1905	777	266	31500	22820	
	AP		75.0	30.6	10.5	61730	44710	224A2	
		1905	777	266	28000	20280			





MAXAM
CONSTRUCTION TIRES



MAXAM MS900

BACKHOE - INDUSTRIAL SERVICE

Rib tread design for 2WD backhoe steer axles.

- Wide tread design for increased flotation
- Wear and cut resistant compound
- Deep undertread for improved puncture resistance

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	10 mph 15 kph	25 mph 40 kph	
11L-15SL	10	TL	8LB	30.6	11.1	15	52	3510	2340	110A8
				777	282	12	360	1590	1060	
11L-16SL	12	TL	8LB	31.7	11.1	17	64	4140	2760	116A8
				805	282	14	440	1875	1250	
14.5/75-16.1SL	10	TL	W11C	36.8	14.6	22	40	4800	3200	121A8
				935	371	17	275	2175	1450	





MAXAM MS901

BACKHOE - INDUSTRIAL SERVICE

Aggressive R4 tread pattern for applications requiring high traction.

- Wide tread design for increased flotation
- Wear and cut resistant compound
- Deep undertread for improved puncture resistance
- Reinforced bead and sidewall for excellent stability

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	25 mph 40 kph	
12.5/80-18 (340/80-18)	12	TL	W9	38.7 983	12.2 310	33 26	58 400	7500 3405	6000 2725	143A8
	16	TL	W9	38.7 983	12.2 310	33 26	72 500	8690 3935	6950 3150	148A8
14.9-24	12	TL	W13	48.2 1224	13.1 333	32 25	42 280	8000 3625	6400 2900	145A8
				50.8 1290	16.0 406	33 26	38 260	8940 4060	7150 3250	149A8
18.4-26	12	TL	W16L	56.1 1425	18.7 475	36 28	36 250	11000 5000	8800 4000	156A8
				56.1 1425	18.7 475	36 28	45 310	13125 6000	10500 4750	162A8
	14	TL	W15L	55.5 1410	17.2 437	34 27	38 260	9815 4500	7850 3550	152A8
				55.5 1410	17.2 437	34 27	44 300	10690 4875	8550 3875	155A8
18.4-28	12	TL	W16	57.1 1450	17.4 442	36 28	36 250	11375 5155	9100 4125	157A8





MAXAM

MS902

BACKHOE - INDUSTRIAL SERVICE

Modified R1 tread pattern for excellent traction and flotation in soft underfoot conditions.

- Tread design optimized with self-cleaning mud breakers
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Wear and cut resistant compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	Position	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa		5 mph 10 kph	25 mph 40 kph	
12.5/80-18	12	TL	9.00	38.8	13.4	26	58	-	7500	6000	143A8
				986	340	21	400	-	3400	2725	
	14	TL	9.00	38.8	13.4	26	62	-	8000	6400	145A8
				986	340	21	425	-	3650	2900	
15.5/80-24 (400/80-24)	12	TL	13.00	50.0	15.5	35	44	-	11550	8250	154A8
				1270	394	28	300	-	5220	3750	
	14	TL	13.00	50.0	15.5	35	51	-	12320	8800	156A8
				1270	394	28	350	-	5600	4000	
	16	TL	13.00	50.0	15.5	35	58	-	13510	9650	159A8
				1270	394	28	400	-	6100	4375	
16.5/85-24	12	TL	13.00	52.0	16.4	35	40	FREE	14700	10500	162A8
									6670	4750	
				1321	417	28	275	DRIVE	10360	7400	150A8
									4700	3350	
	14	TL	13.00	52.0	16.4	35	48	FREE	15960	11400	165A8
									7240	5150	
				1321	417	28	330	DRIVE	11270	8050	153A8
									5100	3650	
16.5/85-28	10	TL	W13	52.0	16.4	35	55	FREE	17220	12300	168A8
									7810	5600	
				1321	417	28	380	DRIVE	12320	8800	156A8
									5600	4000	
				54.9	15.2	35	33	FREE	12320	8800	156A8
									5600	4000	
16.5/85-28	10	TL	W13	1394	386	28	225	DRIVE	8610	6150	144A8
									3900	2800	





MAXAM

MS903

BACKHOE - INDUSTRIAL SERVICE

Modified R4 tread pattern for excellent traction and flotation in soft underfoot conditions.

- Tread design optimized with self-cleaning mud breakers
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Wear and cut resistant compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	25 mph 40 kph	
18.4-26 (480/80-26)	12	TL	W16L	56.3	18.8	36	36	11000	8800	156A8
				1430	478	29	250	5000	4000	
	16	TL	W16L	56.3	18.8	36	45	13125	10500	162A8
				1430	478	29	310	5940	4750	
16.9-28 (440/80-28)	12	TL	W15L	55.5	17.2	34	38	9815	7850	152A8
				1410	437	27	260	4440	3550	
	14	TL	W15L	55.5	17.2	34	44	10690	8550	155A8
				1410	437	27	300	4840	3875	
16.9-30 (420/85-30)	12	TL	W15L	57.5	17.1	34	34	10060	8050	153A8
				1461	434	27	235	4560	3650	
	14	TL	W15L	57.5	17.1	34	45	11000	8800	156A8
				1461	434	27	310	5000	4000	
18.4-30 (460/85-30)	12	TL	W16L	60.2	18.5	36	36	11690	9350	158A8
				1529	470	29	250	5310	4250	
	14	TL	W16L	60.2	18.5	36	42	12375	9900	160A8
				1529	470.0	29.0	290	5625	4500	





MAXAM MS904

BACKHOE - INDUSTRIAL SERVICE

Modified R4 tread pattern for applications combining high off-road traction and excellent on road performance.

- Tread design optimized with self-cleaning mud breakers
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Wear and cut resistant compound
- Increased net-to-gross for long tread life

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm		5 mph 10 kph	25 mph 40 kph	
17.5L-24 (460/70-24)	10	TL	W15L	48.8	17.5	33	32	7690	6150	144A8
				1240	445	26	220	3500	2800	
	12	TL	W15L	48.8	17.5	33	38	8940	7150	149A8
				1240	445	26	26	4060	3250	
	16	TL	W15L	48.8	17.5	33	46	11000	8800	156A8
				1240	445	26	320	5000	4000	
19.5L-24 (500/70-24)	12	TL	W16L	51.7	19.5	34	33	9500	7600	151A8
				1313	495	28	225	4310	3450	
	16	TL	W16L	51.7	19.5	34	42	11375	9100	157A8
				1313	495	28	290	5150	4125	
	21L-24	TL	W18	53.3	20.0	35	32	10690	8550	155A8
				1354	508	28	220	4840	3875	





MAXAM MS906

SKID STEER

Deep R4 tread pattern designed for skid steer, backhoe and telehandler applications.

- Full, flat profile with self-cleaning stepped tread improves performance
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Special cut resistant compound improves wear and reduces tread chunking

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	30 mph 50 kph
5.70-12	6	TL	4.50	22.4 569	5.7 145	18 14	60 415	1450 660	900 410
23x8.50-12	6	TL	7JA	22.9 583	8.5 214	17 13	50 340	1820 825	1145 515
	8	TL	7JA	22.9 583	8.5 214	17 13	65 450	2150 975	1355 615
	12	TL	7JA	22.9 583	8.5 214	17 13	75 515	2680 1215	1690 760
				26.9 682	8.7 221	18 14	60 415	2910 1320	1820 825
27x8.50-15	8	TL	7JA	26.9 682	8.7 221	18 14	60 415	2910 1320	1820 825
27x10-12	14	TL	8.00G	27.6 701	10.4 254	24 19	100 690	7800 3500	5040 2250
7.00-15	6	TL	5.50	29.9 760	7.8 198	21 16	60 415	3180 1400	2015 920
	8	TL	5.50	29.9 760	7.8 198	21 16	70 480	3640 1650	2290 1030
31x15.50-15	8	TL	13LB	31.0 787.0	15.1 384	30 23	45 310	4400 2000	2760 1250
10-16.5	10	TL	8.25	30.2 768	10.7 271	21 16	75 515	4710 2130	2950 1330
12-16.5	12	TL	9.75	32.8 834	13.0 331	25 20	80 550	6320 2850	4030 1830
14-17.5	14	TL	10.50	36.2 920	14.2 360	33 26	80 550	8540 3870	5360 2430
15-19.5	14	TL	11.75	40.2 1020	15.3 389	33 26	70 480	10060 4560	6425 2915
	16	TL	11.75	40.2 1020	15.3 389	33 26	80 550.0	10880 4935	6930 3150





MAXAM MS916

SKID STEER

Deep R4 tread pattern designed for skid steer, backhoe and telehandler applications.

- Deep undertread for improved puncture resistance
- Special cut resistant compound improves wear and reduces tread chunking

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	30 mph 50 kph
10-16.5	8	TL	8.25	30.4	10.4	19	60	4140	2950
				772	264	15	415	1900	1340
12-16.5	10	TL	9.75	32.8	12.4	23	65	5680	3520
				833	315	18	450	2575	1600
14-17.5	14	TL	10.50	36.2	13.8	25	80	8550	5360
				919	351	20	550	3875	2430





MAXAM MS918R

SKID STEER/BACKHOE

All-steel-radial, non-directional traction tire for skid steer and backhoe applications.

- High net-to-gross pattern provides exceptionally long tread life
- Lug siping improves traction in loose soil or snowy conditions
- All-steel-radial casing evenly distributes tire load for high flotation and minimal ground disturbance
- Steel belts stabilize tread and provide high resistance to puncture and impact

Applications:



Size	Alt Size	Type	Rim	O.D.	S.W.	T.D.	Inf. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	25 mph 40 kph	
265/70R16.5	10R16.5	TL	8.25	30.4 774	10.4 264	23 18	90 620	5240 2375	- -	138A2
305/70R16.5	12R16.5	TL	9.75	32.7 831	12.1 307	28 23	90 620	6800 3075	- -	147A2
340/80R18	12.5/80R18	TL	11.00	39.4 1001	13.5 343	24 19	58 400	- 2725	6000	143A8
500/70R24	19.5LR24	TL	W16L	51.7 1314	19.5 495	35 28	58 400	- 5000	11000	164A8





MAXAM MS907

L5 SKID STEER AND BACKHOE

Extra deep, aggressive L5 tread pattern designed for skid steer, backhoe and telehandler applications.

- Full, flat profile with self-cleaning stepped tread improves performance
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Special cut resistant compound improves wear and reduces tread chunking
- Increased net-to-gross for maximum tread life and lowest cost per hour

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph
23x8.50-12	8	TL	7JA	22.6	8.4	35	65	2150
				574	213	28	450	975
27x8.50-15	10	TL	7JA	27.0	8.7	38	75	3300
				686	221	30	515	1500
10-16.5	14	TL	8.25	31.3	10.9	44	105	5680
				795	278	35	620	1800
12-16.5	14	TL	9.75	33.1	13.0	44	90	6780
				842	330	35	620	3075
14-17.5	16	TL	10.50	36.8	14.1	46	90	9100
				935	357	36	620	4125
12.5/80-18	14	TL	W9	38.0	12.0	47	62	8260
				965	306	37	425	3745
	16	TL	W9	38.0	12.0	47	70	8940
				965	306	37	480	4055
19.5L-24	14	TL	W16L	51.1	19.3	48	38	10310
				1298	490	38	265	4680
21L-24	16	TL	W18	54.1	20.6	50	40	12375
				1374	523	40	275	5615
16.9-28	14	TL	W15L	55.5	17.7	48	45	10690
				1410	450	38	310	4850





MAXAM MS705

CONSTRUCTION PRO

Applications:



Premium 3-stage solid skid steer tire. Ideal for the most extreme OTR and construction applications. Extra deep tread allows for 3 to 5 times longer tire life vs pneumatic.

- 3-stage, 100% rubber construction:
 - Ultra cut and wear resistant tread compound
 - Heat resistant cushion center compound
 - Pure rubber base compound
 - Internal steel ring reinforcement eliminates wheel slip

- Zero maintenance solid construction:
 - No flats due to punctures or sidewall damage
 - No routine air pressure checks
- Self-cleaning R4 tread pattern designed for maximum chunk resistance
- Aperture (AP) sidewall configuration designed to provide soft ride
- Smooth tread available to maximize tire life

Size	Alt. Size	Tread	Sidewall	Rim	O.D.	S.W.	T.D.	L.C.C. (lbs/kg)		L.I.
					in mm	in mm	in mm	5 mph 10 kph	10 mph 15 kph	
10-16.5	31x10-20	SM	ST	7.5x20	31.0 787	10.0 254	1.7 43	7850 3550	5690 2575	152A2
		SM	AP	7.5x20	31.0 787	10.0 254	1.7 43	6950 3150	5030 2280	148A2
		R4	ST	7.5x20	31.0 787	10.0 254	1.7 43	7850 3550	5690 2575	152A2
		R4	AP	7.5x20	31.0 787	10.0 254	1.7 43	6950 3150	5030 2280	148A2
12-16.5	33x12-20	SM	ST	7.5x20	33.0 838	11.0 279	2.2 56	8800 4000	6375 2900	156A2
		SM	AP	7.5x20	33.0 838	11.0 279	2.2 56	7850 3550	5690 2575	152A2
		R4	ST	7.5x20	33.0 838	11.0 279	2.2 56	8800 4000	6375 2900	156A2
		R4	AP	7.5x20	33.0 838	11.0 279	2.2 56	7850 3550	5690 2575	152A2
14-17.5	36x14-20	R4	ST	7.5x20	36.0 914	13.7 348	2.9 72	9650 4375	6990 3170	159A2
		R4	AP	7.5x20	36.0 914	13.7 348	2.9 72	8550 3875	6190 3170	155A2





MAXAM

MS706

CONSTRUCTION PRO

Applications:



Premium 3-stage solid skid steer tire. Ideal for the most extreme OTR and construction applications. Extra deep tread allows for 3 to 5 times longer tire life vs pneumatic.

- 3-stage, 100% rubber construction:
 - Ultra cut and wear resistant tread compound
 - Heat resistant cushion center compound
 - Pure rubber base compound
 - Internal steel ring reinforcement eliminates wheel slip
- Zero maintenance solid construction:
 - No flats due to punctures or sidewall damage
 - No routine air pressure checks
- Solid centerline provides smoother running on hard surfaces and better chunk resistance on rocky ground

Size	Alt. Size	Rim	O.D.	S.W.	T.D.	L.C.C. (lbs/kg)		L.I.
			in mm	in mm	in mm	5 mph 10 kph	10 mph 15 kph	
10-16.5	31x10-20	7.5x20	31.0	10.0	2.3	7850	5690	152A2
			787	254	58	3550	2570	
12-16.5	33x12-20	7.5x20	33.0	11.0	2.9	8800	6375	156A2
			838	279	74	4000	2900	
14-17.5	36x14-20	7.5x20	36.0	13.7	3.5	9650	6990	159A2
			914	348	89	4375	3170	





MAXAM

MS705 XD

CONSTRUCTION PRO

Applications:



Premium mold-on solid skid steer tire. Ideal for the most extreme OTR and construction applications. Extra deep tread allows for 3 to 5 times longer tire life vs pneumatic.

- 100% cut resistant rubber construction
- Bonded tire/wheel assembly allows for easy bolt-on installation
- High strength carbon steel wheel
- Zero maintenance solid construction:
 - No flats due to punctures or sidewall damage
 - No routine air pressure checks
- Self-cleaning R4 tread pattern designed for maximum chunk resistance
- Aperture (AP) sidewall configuration designed to provide soft ride
- Smooth tread available to maximize tire life

Size	Alt. Size	Tread	Sidewall	O.D.	S.W.	T.D.	L.C.C. (lbs/kg)		L.I.
				in mm	in mm	in mm	5 mph 10 kph	10 mph 15 kph	
10-16.5	31x6x10	SM	ST	31.0	10.0	1.7	7850	5690	152A2
				787	254	43	3550	2570	
		SM	AP	31.0	10.0	1.7	6950	5030	148A2
				787	254	43	3150	2280	
		R4	ST	31.0	10.0	1.7	7850	5690	152A2
				787	254	43	3550	2570	
		R4	AP	31.0	10.0	1.7	6950	5030	148A2
				787	254	43	3150	2280	
12-16.5	33x6x11	SM	ST	33.0	11.0	2.2	8800	6375	156A2
				838	279	56	4000	2900	
		SM	AP	33.0	11.0	2.2	7850	5690	152A2
				838	279	56	3550	2575	
		R4	ST	33.0	11.0	2.2	8800	6375	156A2
				838	279	56	4000	2900	
		R4	AP	33.0	11.0	2.2	7850	5690	152A2
				838	279	56	3550	2575	





MAXAM MS709

CONSTRUCTION PRO

Solid telehandler tire provides maintenance free performance and industry leading tread life.

- Extra deep, aggressive non-directional traction pattern
- Reinforced centerline eliminates lug flexing and tearing
- Specialized tread compound runs cooler and resists wear and chunking
- Zero maintenance airless tire construction
 - No flats due to punctures or sidewall damage
 - No routine air pressure checks
- Available as the tire-only or mounted assemblies for most telehandler machines

Applications:



Size	Alt Size	Tread	Sidewall	O.D.	S.W.	T.D.	L.C.C. (lbs/kg)	
				in mm	in mm	32nds mm	5 mph 10 kph	10 mph 15 kph
13.00-24	8.50	TR	AP	50.3	12.5	4.0	16500	14350
				1278	318	102	7500	6525
14.00-24	8.50	TR	AP	53.0	13.5	4.4	20900	18180
				1346	343	111	9500	8250





MAXAM MS905

GRADER / TELEHANDLER

Aggressive R4 tread pattern for use on graders and telehandlers where high traction is required.

- Tread design optimized with self-cleaning mud breakers
- Center tie bar reduces vibration during over-the-road driving
- Deep undertread for improved puncture resistance
- Wear and cut resistant compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	25 mph 40 kph	
13.00-24	12	TL	8.00TG	50.2	13.7	32	44	9550	6000	143A8
				1276	349	25	300	4360	2725	
	14	TL	8.00TG	50.2	13.7	32	51	10500	6600	146A8
				1276	349	25	350	4800	3000	
	16	TL	8.00TG	50.2	13.7	32	58	11400	7150	149A8
				1276	349	25	400	5200	3250	
14.00-24	12	TL	8.00TG	53.0	14.5	32	36	10390	6800	147A8
				1346	368	25	250	4700	3075	
	16	TL	8.00TG	53.0	14.5	32	51	12300	8050	153A8
				1346	368	25	350	5580	3650	





MAXAM

MS915

GRADER - TELEHANDLER

Deep, non-directional traction pattern for telehandler and grader use.

- Excellent traction in all off-road conditions
- Thick undertread for improved puncture resistance
- Wear and cut resistant tread compound
- Wide, flat footprint profile for maximum stability and wear
- Increased net-to-gross and tread depth for highest tread life

Applications:



Size	P.R.	Type	Rim	Alt. Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	Infl. P.	L.C.C. (lbs/kg)	L.I.
					in	in	32nds	psi	5 mph	psi	25 mph	
					mm	mm	mm	KPa	10 kph	KPa	40 kph	
13.00-24	12	TL	10.00VA	8.00TG	50.3	13.1	32	65	12300	44	6000	168A2/143A8
					1278	333	25	450	5600	300	2725	
	16		10.00VA	-	50.3	13.1	32	87	14300	58	7150	173A2/149A8
					1278	333	25	600	6500	400	3250	
14.00-24	12	TL	10.00VA	8.00TG	53.1	14.3	34	62	13900	36	6800	172A2/147A8
					1349	363	27	425	6300	250	3075	
	16		10.00VA	-	53.1	14.3	34	80	16100	51	8050	177A2/153A8
					1349	363	27	550	7300	350	3650	





MAXAM MS908

WHEELED EXCAVATOR

For use on wheeled excavators where traction and stability are required.

- Self-cleaning, open tread with mud breakers provides improved traction
- Reinforced sidewall for high stability and cut resistance
- Centerline tread tie bars reduces vibration during over-the-road driving

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in. mm	32nds mm	psi KPa	5 mph 10 kph	30 mph 50 kph	
8.25-20	14	TT	6.50	37.4	8.8	24	105	7640	4940	136B
				950	224	19	720	3460	2240	
9.00-20	14	TT	7.00	39.6	9.9	25	102	8540	5520	140B
				1006	251	20	700	3865	2500	
10.00-20	16	TT	7.50	41.4	10.8	26	108	10740	6950	148B
				1052	274	21	740	4875	3150	
11.00-20	16	TT	8.00	42.0	11.0	28	105	11450	7400	150B
				1067	279	22	720	5180	3350	





MAXAM MS926

TRENCHER

Designed for exceptional traction and flotation in muddy, off-road conditions. Ideal for use on trenchers and truck-mounted forklift applications.

- Aggressive traction pattern ideal in muddy ground conditions
- Wide tread profile for stability and flotation
- Reinforced sidewall improves impact resistance and protects rim from damage

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Inf. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in. mm	32nds mm	psi KPa	25 mph 40 kph	
29 x 12.5-15	8	TT	10LB	30.6	11.9	23	40	2150	107A8
				777	301	18	275	975	
31 x 15.50-15	8	TL	13LB	32.1	15.2	24	45	4400	132A2
				815	387	19	310	2000	





MAXAM MS909

MULTIPURPOSE

For use in loader, earthmover and agricultural applications where high traction is required.

- Wide, open tread design for maximum flotation and traction on soft terrain
- Reinforced sidewall for high stability and cut resistance
- Center tie bar minimizes roading vibration
- Cut and wear resistant tread compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in. mm	32nds mm	psi KPa	30 mph 50 kph	
405/70-20 (16/70-20)	12	TL	13.00	42.4	16.2	42	46	6400	145B
				1077	411	33	320	2900	
	14	TL	13.00	42.4	16.2	42	51	7150	149B
				1077	411	33	350	3250	
	16	TL	13.00	42.4	16.2	42	58	7850	152B
				1077	411	33	400	3550	
405/70-24 (16/70-24)	14	TL	13.00	46.2	15.9	42	58	7850	152B
				1173	404	33	400	3550	
	16	TL	13.00	46.2	15.9	42	72	8800	156B
				1173	404	33	500	4000	
445/65-19.5 (18-19.5)	16	TL	14.00	43.1	18.0	34	85	9900	160B
				1095	457	27	585	4500	
	18	TL	14.00	43.1	18.0	34	100	11000	164B
				1095	457	27	690	5000	
445/65-22.5 (18-22.5)	16	TL	14.00	46.1	18.0	36	85	10700	163B
				1171	457	29	585	4875	
	18	TL	14.00	46.1	18.0	36	100	12000	167B
				1171	457	29	690	5450	





MAXAM

MS910R

MULTIPURPOSE RADIAL

For use in loader, earthmover and agricultural applications where high traction is required.

- Versatile non-directional, off-the-road tread pattern
- Excellent on-road suitability
- All-steel radial construction for maximum durability, stability, traction and comfort
- Special self-cleaning design with dome mud breakers

Applications:



Multipurpose Radial

Size	Type	Rim	O.D.	S.W.	T.D.	Speed	Infl. P.	L.C.C.	L.I.
			in mm	in mm	32nds mm	mph kph	psi KPa	lbs kg	
335/80R18 MPT	TL	11.00	38.9	13.1	23	68	51	4400	132K
			989	334	18.5	110	350	2000	
335/80R20 MPT	TL	11.00	41	13.1	23	68	94	7150	149K
			1041	334	18.5	110	650	3250	





Construction Applications

Size	Type	Rim	O.D.	S.W.	T.D.	Speed	Infl. P.	L.C.C.	L.I.
			in mm	in mm	32nds mm	mph kph	psi KPa	lbs kg	
335/80R18 EM	TL	11.00	38.9	13.1	23	6	54	6400	145A2
			989	334	18.5	10	375	2900	
365/70R18 EM	TL	11.00	38	14.3	26	6	54	6600	146A2
			966	363	20.5	10	375	3000	
405/70R18 EM	TL	13.00	40.3	15.9	26	6	54	8050	153A2
			1023	405	20.5	10	375	3650	
335/80R20 EM	TL	11.00	41	13.1	23	6	54	6800	147A2
			1041	334	18.5	10	375	3075	
365/80R20 EM	TL	11.00	42.9	14.3	23	6	54	8050	153A2
			1089	363	18.5	10	375	3650	
405/70R20 EM	TL	13.00	42.4	16.0	26	6	54	8550	155A2
			1076	407	20.5	10	375	3875	
405/70R24 EM	TL	13.00	46.5	16.1	26	6	54	9350	158A2
			1181	409	20.5	10	375	4250	

Industrial Applications

Size	Type	Rim	O.D.	S.W.	T.D.	Speed	Infl. P.	L.C.C.	L.I.
			in mm	in mm	32nds mm	mph kph	psi KPa	lbs kg	
340/80R18 IND	TL	11.00	38.9	13.1	23	30	54	6000	143A8/B
			989	334	18.5	50	375	2725	
400/70R18 IND	TL	13.00	40.3	15.9	26	30	54	6800	147A8/B
			1023	405	20.5	50	375	3075	
460/70R24 IND	TL	14.00	49.2	18.1	30	30	54	9650	159A8/B
			1249	460	23.5	50	375	4375	





MAXAM MS922

E7 PAVER

Standard E7 rib pattern maximizes ground contact and tread life while minimizing compaction.

- Low pressure, high flotation E7 pattern
- Paver compound resists chemical degradation
- Wear and cut resistant tread compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	
14.00-20	12	TT	10.00W	47.8	14.6	15	58	12000	167A2
				1214.0	370	12	400	5450	
	14	TT	10.00W	47.8	14.6	15	69	13200	170A2
				1214.0	370	12	475	6000	
18.00-25	16	TL	10.00/1.5	60.7	18.1	20	58	22700	189A2
				1543	460	16	400	10300	
	20	TL	10.00/1.5	60.7	18.1	20	69	25400	193A2
				1543	460	16	475	11500	
21.00-25	28	TL	15.00/3.0	66.4	22.2	22	83	36400	205A2
				1687	565	18	575	16500	





MAXAM MS938

R3 COMPACTOR

High flotation R3 pattern provides minimal ground compaction while providing excellent traction in field and paving applications.

- Excellent traction in all conditions
- Thick undertread for improved puncture resistance
- Low pressure minimizes soil disturbance
- Wear and cut resistant tread compound

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	25 mph 40 kph	
23.1-26	12	TL	DW20	61.7	23.1	23	32	13400	8550	155A8
				1570	587	18	220	6100	3875	
28L-26	16	TL	DW25	62.6	28.2	34	36	17000	10500	162A8
				1590	717	27	250	7710	4750	







MAXAM
INDUSTRIAL TIRES



MAXAM

MS601+

INDUSTRIAL PRO

Applications:



Premium press-on band solid cushion tire optimized for durability and performance. Designed with a durable tread compound to supply 15% more wear resistance than the MS601. Enhanced mixing and building process ensures optimum performance in the working environment.

- Premium natural rubber compounds
- Chunk resistant, non-marking
- Low Rolling Resistance (LRR) black for high energy efficiency
- Product conforms to TRA and ETRTO global design standards
- Wide footprint for maximum grip and lifting stability
- Full tread profile provides uniform load distribution
- Outstanding chunk and tear resistance
- Deep tread configuration for superior traction

Size	Type		O.D.		S.W.		L.C.C. (lbs/kg)				
	SM	TR	in.	mm	in.	mm	6 mph/10 kph		10 mph/15 kph		10 mph/15 kph Other Vehicles
							Load Wheels	Steer Wheels	Load Wheels	Steer Wheels	
9 x 5 x 5	*	*	9.0	229	5.0	127	2115/960	1740/790	1885/855	1575/715	1500/680
10 x 4 x 6 1/2	*		10.0	254	4.0	102	1720/780	1410/640	1545/700	1300/590	1235/560
10 x 4 3/4 x 6 1/2	*		10.0	254	4.75	121	2095/950	1720/780	1865/845	1565/710	1490/675
10 x 5 x 6 1/2	*	*	10.0	254	5.0	127	2225/1010	1830/830	1995/905	1675/760	1600/725
10 1/2 x 5 x 6 1/2	*		10.5	267	5.0	127	2360/1070	1940/880	2115/960	1785/810	1700/770
12 x 4 1/2 x 8	*		12.0	305	4.5	114	2305/1045	1885/855	2050/930	1720/780	1630/740
12 x 5 1/2 x 8	*		12.0	305	5.5	140	2955/1340	2425/1100	2625/1190	2215/1005	2095/950
13 1/2 x 4 1/2 x 8	*		13.5	343	4.5	114	2535/1150	2070/940	2259/1025	1895/860	1810/820
13 1/2 x 5 1/2 x 8	*	*	13.5	343	5.5	140	3330/1510	2735/1240	2965/1345	2490/1130	2380/1080
14 x 4 1/2 x 8	*		14.00	356	4.5	114	2580/1170	2115/960	2305/1045	1930/875	1830/830
14 x 5 x 10	*	*	14.00	356	5.0	127	2940/1335	2415/1095	2635/1195	2205/1000	2105/955
15 x 4 x 11 1/4	*		15.00	381	4.0	102	1960/890	1610/730	1765/800	1480/670	1545/700
15 x 5 x 11 1/4	*		15.00	381	5.0	127	3065/1390	2515/1140	2735/1240	2295/1040	2170/985
16 x 5 x 10 1/2	*	*	16.00	406	5.0	127	3330/1510	2735/1240	2965/1345	2490/1130	2380/1080
16 x 6 x 10 1/2	*	*	16.00	406	6.0	152	4210/1910	3460/1570	3770/1710	3165/1435	3000/1360
16 x 7 x 10 1/2	*		16.00	406	7.0	178	5125/2325	4210/1910	4565/2070	3835/1740	3660/1660
16 1/4 x 5 x 11 1/4	*		16.25	413	5.0	127	3375/1530	2755/1250	3000/1360	2525/1145	2405/1090
16 1/4 x 6 x 11 1/4	*	*	16.25	413	6.0	152	4235/1920	3485/1580	3780/1715	3175/1440	3020/1370
16 1/4 x 7 x 11 1/4	*		16.25	413	7.0	178	5125/2325	4190/1900	4540/2060	3825/1735	3640/1650
16 x 2 1/2 x 13 3/4	*		16.00	406	2.5	63	1985/900	1620/735	1765/800	1490/675	1410/640
18 x 5 x 12 1/8	*	*	18.00	457	5.0	127	3615/1640	2975/1350	3240/1470	2710/1230	2580/1170
18 x 6 x 12 1/8	*	*	18.00	457	6.0	152	4630/2100	3790/1720	4125/1870	3470/1575	3305/1500
18 x 7 x 12 1/8	*	*	18.00	457	7.0	178	5620/2550	4630/2100	5025/2280	4210/1910	4010/1820
18 x 8 x 12 1/8	*	*	18.00	457	8.0	203	6615/3000	5455/2475	5910/2680	4960/2250	4740/2150
18 x 9 x 12 1/8	*	*	18.00	457	9.0	229	7605/3450	6285/2850	6810/3090	5730/2600	5455/2475
20 1/2 x 7 x 17 3/4	*		20.50	521	7.0	178	8025/3640	6580/2985	7145/3240	6020/2730	5700/2585
21 x 6 x 15	*	*	21.00	533	6.0	152	5180/2350	4255/1930	4630/2100	3890/1765	3705/1680
21 x 7 x 15	*	*	21.00	533	7.0	178	6340/2875	5180/2350	5645/2560	4740/2150	4520/2050
21 x 8 x 15	*	*	21.00	533	8.0	203	7440/3375	6120/2775	6670/3025	5600/2540	5345/2425
21 x 9 x 15	*		21.00	533	9.0	229	8600/3900	7055/3200	7660/3475	6435/2920	6120/2775
22 x 8 x 16	*	*	22.00	559	8.0	203	7715/3500	6340/2875	6900/3130	5785/2625	5510/2500
22 x 9 x 16	*	*	22.00	559	9.0	229	8930/4050	7330/3325	7935/3600	6670/3025	6340/2875
22 x 10 x 16	*	*	22.00	559	10.0	254	10085/4575	8270/3750	8995/4080	7550/3425	7165/3250
22 x 12 x 16	*	*	22.00	559	12.0	305	12400/5625	10195/4625	11090/5030	9315/4225	8875/4025
22 x 14 x 16	*		22.00	559	14.0	356	14770/6700	12135/5505	13185/5980	11080/5025	10550/4785
22 x 16 x 16	*		22.00	559	16.0	406	17075/7745	14020/6360	15245/6915	12810/5810	12190/5530
28 x 12 x 22	*	*	28.00	711	12.0	305	14860/6740	12215/5540	13270/6020	11155/5060	10625/4820
28 x 14 x 22	*		28.00	711	14.0	356	17680/8020	14530/6590	15785/7160	13270/6020	12610/5720
28 x 16 x 22	*		28.00	711	16.0	406	20435/9270	16800/7620	18080/8280	15320/6950	14595/6620
36 x 10 x 30	*		36.00	914	10.0	254	14575/6610	11950/5420	12965/5880	10925/4955	10350/4695



MAXAM

MS701+

INDUSTRIAL PRO

Premium 3-stage solid resilient tire optimized for durability and performance. Designed with a durable tread compound to supply 15% more wear resistance. Improved center compound delivers 25% more heat resistance than the MS701. Enhanced mixing and building process ensures optimum performance in the working environment.

- Premium natural rubber compounds
- Cut and Tear resistant tread
- Chunk Resistant, Non-Marking (NM)
- Soft, heat resistant cushion center
- Pure rubber base compound
- Compounds do not contain crumb rubber or other fill materials
- Premium 3-Stage compound construction:
 - Evenly layered compound uniformity
 - Internal steel ring reinforcement eliminates wheel slip
- Wide footprint for maximum lifting stability
- Full tread profile for uniform load distribution
- Deep tread configuration for superior traction
- Product conforms to TRA and ETRTO global design standards
- Available in both Standard, and Swift (Clip/Halo/LOC) bead set configuration

Applications:



Size	Rim	Type		O.D.		S.W.		T.D.		L.C.C. (lbs/kg)	
		STD	SWIFT	in.	mm	in.	mm	in.	mm	15 mph/25 kph	
										Load Wheels	Steer Wheels
15x4.1/2-8	3.00D	*	*	14.8	376	4.5	114	1.1	28	2295/1040	1765/800
	3.25I	*	*	14.8	376	4.5	114	1.1	28	2295/1040	1765/800
4.00-8	3.00D	*	*	16.1	409	4.1	104	1.4	36	2095/950	1610/730
5.00-8	3.00D	*	*	17.7	450	4.8	122	1.4	36	3120/1415	2405/1090
16x6-8	4.33R	*	*	16.2	411	5.9	150	1.2	30	3210/1455	2470/1120
18x7-8	4.33R	*	*	17.9	455	6.2	157	1.5	38	4730/2145	3640/1650
140/55-9	4.00E	*	*	14.9	378	5.1	130	1.1	28	2580/1170	1985/900
6.00-9	4.00E	*	*	20.6	523	5.4	137	1.7	43	4155/1885	3200/1450
21x8-9	6.00E	*	*	20.4	518	7.4	188	2.0	51	6075/2755	4675/2120
200/50-10	6.50F	*	*	18.1	460	7.5	190	1.6	41	5445/2470	4190/1900
6.50-10	5.00F	*	*	22.3	566	6.4	163	2.0	51	5160/2340	3970/1800
23x9-10	6.50F	*	*	23.0	584	8.0	203	2.2	56	7595/3445	5840/2650
23x10-12	8.00G	*	*	23.0	584	9.2	234	2.2	56	8310/3770	6395/2900
7.00-12	5.00S	*	*	25.7	653	6.8	173	2.2	56	6440/2920	4940/2240
27x10-12	8.00G	*	*	26.8	681	9.8	249	2.2	56	8600/3900	6610/3000
315/45-12	10.00G	*	*	22.5	571	11.1	282	2.2	56	9890/4485	7605/3450
28x9-15 (8.15-15)	7.00	*	*	27.0	686	8.6	218	2.0	51	8600/3900	6615/3000
28x12.5-15	9.75	*	*	28.1	714	11.3	287	2.2	56	12180/5525	9370/4250
7.00-15	5.50	*	*	28.7	729	7.0	178	2.2	56	7815/3545	6010/2725
	6.00	*	*	28.7	729	7.0	178	2.2	56	7815/3545	6010/2725
7.50-15	6.50	*	*	29.6	752	7.8	198	2.3	58	8600/3900	6615/3000
250-15	7.00	*	*	28.2	716	8.9	226	2.1	53	10230/4640	7870/3570
	7.50	*	*	28.2	716	8.9	226	2.1	53	10230/4640	7870/3570
8.25-15	6.50	*	*	32.0	813	8.3	211	2.8	71	10470/4750	8050/3650
300-15	8.00	*	*	32.1	815	10.1	256	2.6	66	12895/5850	9920/4500
355/65-15 (350-15)	9.75	*	*	32.2	818	12.3	312	3.5	89	17195/7800	13230/6000
400/60-15	11.00	*	*	32.4	823	13.1	333	3.3	84	19775/8970	15210/6900
355/50-20	10.00	*	*	33.3	846	12.7	323	2.6	66	19820/8990	15245/6915
	6.50	*	*	38.7	983	9.3	236	2.9	74	11905/5400	9920/4500
9.00-20	7.00	*	*	38.7	983	9.3	236	2.9	74	11905/5400	9920/4500
	7.50	*	*	38.7	983	9.3	236	2.9	74	11905/5400	9920/4500
	7.00	*	*	40.7	1034	10.0	254	3.2	81	13230/6000	11025/5000
10.00-20	7.50	*	*	40.7	1034	10.0	254	3.2	81	13230/6000	11025/5000
	8.00	*	*	40.7	1034	10.0	254	3.2	81	13230/6000	11025/5000
	8.00	*	*	42.8	1087	11.3	287	3.4	86	16660/7560	13890/6300
12.00-20	8.50	*	*	42.8	1087	11.3	287	3.4	86	16660/7560	13890/6300
	10.00	*	*	42.8	1087	11.3	287	3.4	86	17190/7800	14330/6500
12.00-24	8.50	*	*	47.0	1194	11.9	302	3.1	79	17720/8040	14770/6700
	10.00	*	*	47.0	1194	11.9	302	3.1	79	19840/9000	16535/7500
14.00-24	10.00	*	*	52.3	1328	12.9	328	4.3	109	24470/11100	20390/9250



MAXAM

MS701 SM

INDUSTRIAL PRO

Premium 3-stage solid resilient tire.

- Smooth tread pattern for maximum tread life
- Premium natural rubber compounds:
 - Compounds do not contain crumb rubber or other fill materials
 - Cut and tear resistant tread
 - Chunk resistant non-marking (NM)
 - Soft, heat resistant cushion center
 - Pure rubber base compound
- Premium 3-stage compound construction:
 - Evenly layered compound uniformity
 - Internal steel ring reinforcement eliminates wheel slip
- Product conforms to TRA and ETRTO global design standards
- Wide footprint for maximum lifting stability
- Full tread profile for uniform load distribution
- Available in both Standard and Swift (Clip/Halo/LOC) bead set configuration

Applications:



Size	Rim	Type		O.D.		S.W.		T.D.		L.C.C. (lbs/kg)	
		STD	SWIFT	in.	mm	in.	mm	in.	mm	15 mph/25 kph	
										Load Wheels	Steer Wheels
18x9-8 SM	7.00	*	*	18.1	460	8.4	213	1.6	41	5590/2535	4300/1950
6.00-9 SM	4.00E	*	*	20.6	523	5.4	137	1.7	43	4155/1885	3200/1450
6.50-10 SM	5.00F	*	*	22.3	566	6.4	163	2.0	51	5160/2340	3970/1800
7.00-12 SM	5.00S	*	*	25.7	653	6.8	173	2.2	56	6440/2920	4940/2240
28x9-15 (8.15-15) SM	7.00	*	*	27.0	686	8.6	218	2.0	51	8600/3900	6610/3000
8.25-15 SM	6.50	*	*	32.0	813	8.3	211	2.8	71	10470/4750	8050/3650
10.00-20 SM	7.50	*		40.7	1034	10.0	254	3.2	81	13230/6000	11025/5000
	8.00	*		40.7	1034	10.0	254	3.2	81	13230/6000	11025/5000
12.00-20 SM	8.00	*		42.8	1087	11.3	287	3.4	86	16660/7560	13890/6300
	8.50	*		42.8	1087	11.3	287	3.4	86	16660/7560	13890/6300
	10.00	*		42.8	1087	11.3	287	3.4	86	17190/7800	14330/6500





MAXAM MS702

INDUSTRIAL STR

Premium 2-stage solid resilient tire.

- Premium natural rubber compounds:
 - Cut and tear resistant tread
 - Chunk resistant, non-marking (NM)
 - Premium nylon reinforced base compound
- 2-stage compound construction with steel torque rings
- Excellent stability
- Deep tread configuration for superior traction
- Available in both Standard, and Swift (Clip/Halo/LOC) bead set configuration

Applications:



Size	Rim	Type		O.D.		S.W.		T.D.		L.C.C. (lbs/kg)	
		STD	SWIFT	in.	mm	in.	mm	in.	mm	15 mph/25 kph	
										Load Wheels	Steer Wheels
100/80-8 SM	2.50C	*		14.3	363	4.3	109	0.9	23	2205/1000	1700/770
15x4.5-8 (125/75-8)	3.00D	*	*	14.7	373	4.2	107	1.1	28	2290/1040	1765800
	3.25I	*		14.7	373	4.2	107	1.1	28	2290/1040	1765800
15x4.5-8 (125/75-8) RIB	2.50C	*		14.7	373	4.2	107	1.1	28	2290/1040	1765800
	3.00D	*	*	14.7	373	4.2	107	1.1	28	2290/1040	1765800
400-8	3.00D	*	*	15.8	401	3.8	97	1.4	36	2095/950	1610/730
400-8 RIB	3.00D	*	*	15.8	401	3.8	97	1.4	36	2095/950	1610/730
5.00-8	3.00D	*	*	17.7	450	4.5	114	1.4	36	3120/1415	2400/1090
16x6-8	4.33R	*	*	16.1	409	5.5	140	1.2	30	3210/1455	2470/1120
18x7-8	4.33R	*	*	17.6	447	5.7	145	1.5	38	4730/2145	3640/1650
140/55-9	4.00E	*	*	14.6	371	4.8	122	1.1	28	2580/1170	1985/900
6.00-9	4.00E	*	*	20.5	521	5.2	132	1.6	41	4155/1885	3200/1450
6.00-9 RIB	4.00E	*	*	20.5	521	5.2	132	1.6	41	4155/1885	3200/1450
21x8-9	6.00E	*	*	20.2	513	7.0	178	2.0	51	6075/2755	4675/2120
200/50-10	6.50F	*	*	17.8	452	7.2	183	1.6	41	5445/2470	4190/1900
6.50-10	5.00F	*	*	22.3	566	6.0	152	2.0	51	5160/2340	3970/1800
23x9-10 (255/75-10)	6.50F	*	*	22.7	576	7.4	188	2.2	56	7595/3445	5840/2650
7.00-12	5.00S	*	*	25.4	645	6.4	163	2.1	53	6440/2920	4940/2240
27x10-12	8.00G	*	*	26.4	670	9.3	236	2.2	56	8600/3900	6610/3000
28x9-15 (8.15-15)	7.00	*	*	26.9	683	8.0	203	2.0	51	8600/3900	6610/3000
7.00-15	5.50	*	*	28.3	719	6.6	168	2.2	56	7815/3545	6010/2725
	5.50	*	*	29.4	747	7.4	188	2.3	58	8600/3900	6610/3000
7.50-15	6.50	*	*	29.4	747	7.4	188	2.3	58	8600/3900	6610/3000
	5.50	*	*	31.7	805	7.6	193	2.8	71	10175/4615	7825/3550
8.25-15	6.50	*	*	31.7	805	7.6	193	2.8	71	10470/4750	8045/3650
	7.00	*	*	28.0	711	8.2	208	2.1	53	10470/4750	8045/3650
250-15 (250/70-15)	7.50	*	*	28.0	711	8.2	208	2.1	53	10470/4750	8045/3650
300-15 (315/70-15)	8.00	*	*	31.8	808	9.5	241	2.5	63	12895/5850	9920/4500
355/65-15 (350-15)	9.75	*	*	32.0	813	11.5	292	3.5	89	17195/7800	13230/6000
10.00-20	7.00	*		40.4	1026	9.8	249	3.1	79	13230/6000	11025/5000
	7.50	*		40.4	1026	9.8	249	3.1	79	13230/6000	11025/5000
	8.00	*		40.4	1026	9.8	249	3.1	79	13230/6000	11025/5000
12.00-20	8.00	*		42.7	1084	10.9	277	3.4	86	16660/7560	13890/6300
	8.50	*		42.7	1084	10.9	277	3.4	86	16660/7560	13890/6300
	10.00	*		42.7	1084	10.9	277	3.4	86	17190/7800	14330/6500



MAXAM

MS701 GSE

GROUND SUPPORT EQUIPMENT

Deep rib pattern and low rolling resistance provides the longest service life and lowest operating cost in ground support applications.

- Extra deep ribs provide exceptional grip in wet conditions
- Reduced vibration and improved stability
- Cool running, cushion center compound
- Low rolling resistance (LRR) tread compound
- Optional apertures for extra soft ride

Applications:



Size	Alt. Size	Rim	Sidewall	O.D.		S.W.		L.C.C. (lbs/kg)	
				in.	mm	in.	mm	6 mph/10 kph	10 mph/15 kph
4.00-8	4.80-8	3.00D	ST	16.0	406	4.6	117	2320/1050	1685/765
			AP	16.0	406	4.6	117	1970/895	1430/650
		3.75I	ST	16.0	406	4.6	117	2910/1320	2105/955
			AP	16.0	406	4.6	117	2470/1120	1800/815
5.00-8	5.70-8	3.75I	ST	17.8	452	5.3	135	3330/1510	2420/1100
			AP	17.8	452	5.3	135	2840/1290	2060/935
		4.25I	ST	17.8	452	5.3	135	3660/1660	2660/1205
			AP	17.8	452	5.3	135	3110/1410	2330/1055
		4.50K	ST	17.8	452	5.3	135	4010/1820	2905/1320
			AP	17.8	452	5.3	135	3410/1545	2470/1120





MAXAM

MS801

INDUSTRIAL PNEUMATICS

Designed for use in multiple applications, the MS801 offers excellent traction and protection from punctures, as well as improved stability.

- Extra wide profile and reinforced sidewall for improved stability
- Thick undertread for maximum puncture resistance
- Self-cleaning industrial tread design provides excellent traction
- Cut and wear resistant compound

Applications:



Size	P.R.	Type	Rim	O.D.		S.W.		T.D.		Infl. P.	L.C.C. (lbs/kg)	
				in.	mm	in	mm	32nds	mm		15 mph/25 kph	
										psi/KPa	Load Wheels	Steer Wheels
18x7-8	14	TT	4.33R	18.3	465	6.8	173	21	17	130/900	4160/1885	3200/1450
	16	TT	4.33R	18.3	465	6.8	173	21	17	145/1000	4730/2145	3640/1650
5.00-8	10	TT	3.00D	18.4	467	5.4	137	18	14	145/1000	3120/1415	2400/1090
6.00-9	10	TT	4.00	21.5	546	6.5	165	20	16	125/850	3785/1715	2910/1320
	12	TT	4.00	21.5	546	6.5	165	20	16	145/1000	4160/1885	3200/1450
23x9-10	18	TT	6.50F	23.0	584	9.0	229	24	19	130/900	6970/3160	5360/2430
	20	TT	6.50F	23.0	584	9.0	229	24	19	145/1000	7590/3445	5840/2650
6.50-10	10	TT	5.00	23.4	594	7.0	178	21	17	112/775	4290/1950	3300/1500
	12	TT	5.00	23.4	594	7.0	178	21	17	140/970	4730/2145	3640/1650
23x10-12	16	TT	8.00G	23.5	597	9.6	244	25	20	115/800	6970/3160	5360/2430
	20	TT	8.00G	23.5	597	9.6	244	25	20	145/1000	8320/3770	6400/2900
7.00-12	12	TT	5.00	26.7	678	7.7	196	22	17	123/850	5900/2680	4540/2060
	14	TT	5.00	26.7	678	7.7	196	22	17	130/900	6085/2755	4680/2120
27x10-12	16	TT	8.00G	26.9	683	10.0	254	29	23	115/800	8580/3900	6600/3000
	18	TT	8.00G	26.9	683	10.0	254	29	23	130/900	9295/4225	7150/3250
8.15-15 (28x9-15)	20	TT	8.00G	26.9	683	10.0	254	29	23	145/1000	10205/4615	7850/3550
	14	TT	7.00	27.9	709	8.7	221	23	18	145/1000	8580/3900	6600/3000
250-15	18	TT	7.50BD	28.9	734	9.8	249	25	20	138/950	10465/4745	8050/3650
	20	TT	7.50BD	28.9	734	9.8	249	25	20	145/1000	11115/5040	8550/3875
7.00-15	14	TT	5.50BD	30.0	762	8.4	213	25	20	135/930	7385/3350	5680/2575
7.50-15	14	TT	6.00BD	32.0	813	8.7	221	25	20	135/930	7995/3640	6150/2800
8.25-15	14	TT	6.50	33.4	848	9.6	244	24	19	115/800	9295/4225	7150/3250
300-15	20	TT	8.00	33.2	843	11.7	297	30	24	130/900	14300/6500	11000/5000
	22	TT	8.00	33.2	843	11.7	297	30	24	145/1000	14820/6695	11400/5150
9.00-20	14	TT	7.00	40.9	1039	10.3	262	38	30	130/900	12870/5850	9900/4500
10.00-20	16	TT	7.50	42.4	1077	11.2	284	43	34	130/900	14300/6500	11000/5000
11.00-20	18	TT	8.00	43.6	1107	11.7	297	45	36	145/1000	17160/7800	13200/6000
12.00-20	24	TT	8.50	45.3	1150	12.5	317	48	38	145/1000	20410/9230	15700/7100
	28	TT	8.50	45.3	1150	12.5	317	48	38	150/1030	20930/9490	16100/7300
12.00-24	20	TT	8.50	49.2	1249	12.5	317	48	38	145/1000	21450/9750	16500/7500
14.00-24	28	TT	10.00W	53.9	1369	14.8	376	52	41	145/1000	28600/13000	22000/10000





MAXAM

MS802 GSE

GROUND SUPPORT EQUIPMENT

For use in ground support, industrial and manufacturing applications, the MS802 GSE offers improved operating costs and reduced down time.

- Extra wide profile and reinforced sidewall for improved stability
- Thick undertread for maximum puncture resistance
- Extra deep rib tread provides exceptional wet grip
- Low rolling resistance (LRR) tread compound

Applications:



Size	P.R.	Type	Rim	O.D.		S.W.		T.D.		Infl. P.	L.C.C. (lbs/kg)	
				in.	mm	in	mm	32nds	mm	psi/KPa	15 mph/25 kph Load Wheels	Steer Wheels
MS802 GSE												
18x7-8	16	TT	4.33R	18.1	460	6.6	168	20	16	145/1000	3640/1650	3060/1385
6.00-9 (6.90-9)	10	TT	4.00E	21.4	543	6.4	163	21	17	125/850	2910/1320	2445/1110
	12	TT	4.00E	21.4	543	6.4	163	21	17	145/1000	3200/1450	2690/1220
6.50-10	14	TT	5.00	23.5	597	7.5	190	20	16	145/1000	3960/1800	3325/1510
23x9-10	20	TT	6.50F	23.0	584	8.8	223	20	16	145/1000	5840/2650	4905/2225
7.00-12	16	TT	5.00	26.9	683	7.7	196	22	17	145/1000	4940/2240	4150/1880
165-13	8	TL	4.50	23.2	589	6.3	160	21	17	65/450	1760/800	1480/670
7.00-15	14	TT	5.50BD	29.8	757	8.2	208	23	18	135/930	5680/2575	4770/2165
7.50-15	16	TT	6.00BD	31.8	808	9.1	231	23	18	145/1000	6600/3000	5545/2520
8.25-15	14	TT	6.50	33.1	841	9.8	248	24	19	115/790	7150/3250	6005/2730
8.00-16.5	8	TL	6.00	29.0	736	8.0	203	20	16	65/450	3740/1700	3140/1430
8.75-16.5	10	TL	6.75	30.3	769	9.1	231	24	19	75/520	4800/2180	4030/1830
	12	TL	6.75	30.3	769	9.1	231	24	19	95/650	5520/2500	4635/2100
MS802W												
8.75-16.5	10	TL	6.75	30.3	770	9.1	230	30	24	75/520	4800/2180	4030/1830
	12	TL	6.75	30.3	770	9.1	230	30	24	95/650	5520/2500	4635/2100



MS707

INDUSTRIAL PRO

Premium solid port tire for terminal trailers.

- SM tread maximizes tire life for lowest operating cost
- Premium Low Rolling Resistance (LRR) tread compound
 - Prevents heat failures
 - Reduces fuel consumption
 - Minimizes tire wear
- Full tread profile for uniform load distribution
- Available in multiple configurations
 - Standard and Swift (Clip/Halo/LOC) bead configuration
 - 2-stage or 3-stage tire construction
 - Dual mount assemblies or tire only

Applications:

Size	Rim	Type		O.D.		S.W.		T.D.		L.C.C. (lbs/kg)	
		STD	SWIFT	in.	mm	in.	mm	in.	mm	15 mph/25 kph Load Wheels	Steer Wheels
10.00-20	7.50	*	*	39.5	1003	9.1	231	2.6	66	13225/6000	11025/5000





MAXAM

MS703

INDUSTRIAL PRO

Premium 3-stage solid resilient tire designed for industrial and port applications.

- Premium natural rubber compounds:
 - Cut and tear resistant tread
 - Chunk resistant non-marking (NM)
 - Soft, heat resistant cushion center
- Premium 3-stage compound construction:
 - Evenly layered compound uniformity
 - Internal steel ring reinforcement eliminates wheel slip
- Product conforms to TRA and ETRTO global design standards
- Wide footprint for maximum lifting stability
- Full tread profile for uniform load distribution

Applications:



Size	Rim	Type		O.D.		S.W.		T.D.		L.C.C. (lbs/kg)	
		STD	SWIFT	in.	mm	in.	mm	in	mm	6 mph/10 kph	10 mph/15 kph
16.00-25	11.25/2.0	*		56.9	1446	15.4	390	5.0	127	33740/15305	24430/11080
18.00-25	13.00/2.5	*		63.3	1607	18.9	480	5.7	145	44800/20320	32440/14715



MAXAM

MS803/ MS804

BIAS PORT IND3 / IND4

Designed for heavy loads and long cycle times typical of demanding port applications.

- Extra wide profile and reinforced sidewall for improved stability
- Multi-bead design to withstand extreme impact and shock loads
- Tread patterns designed to maximize tread life
- Cut and wear resistant compound
- High quality casing allows for excellent retreadability

Applications:



Size	P.R.	Type	Rim	O.D.		S.W.		T.D.		Infl. P.	L.C.C. (lbs/kg)	
				in	mm	in.	mm	32nds	mm	psi/KPa	15 mph/25 kph	
											Load Wheels	Steer Wheels
12.00-20 TR	20	TT	8.50	46.2	1173	12.3	312	25	20	145/1000	20410/9230	15700/7100
14.00-24 TR	28	TT	10.00W	53.5	1359	14.4	366	58	46	145/1000	28600/13000	22000/10000
16.00-25 SM	32	TL	11.25/2.0	60.9	1547	16.9	429	64	51	145/1000	35880/16250	27600/12500
18.00-25 SM	40	TL	13.00/2.5	65.9	1674	19.9	505	68	54	145/1000	50180/22750	38600/17500
18.00-33 SM	40	TL	13.00/2.5	73.7	1872	19.5	495	69	55	145/1000	60710/27560	46700/21200

* Load ratings for counterbalanced industrial cyclic application. Please contact a MAXAM representative for other applications.





MAXAM MS307

PORTXTRA IND-3

All-steel radial industrial tires designed for heavy loads and long cycle times in port and marina applications. Belt-stabilized tread provides better traction, longer tread life and lower heat build up than bias construction tires.

- Belt-stabilized tread provides better traction and wear performance
- Extra wide profile and reinforced sidewall for improved stability
- Tread pattern designed to maximize tread life
- Cut and wear resistant compound
- High quality casing allows for excellent retreadability

Applications



Size	Rating	Type	Rim	O.D.		S.W.		T.D.		Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	mm	in.	mm	32nds	mm			
12.00R20	★★★	TT	8.50	45.0	1144	12.7	322	37	30	145/1000	20410/9230	176A5
12.00R24	★★★	TT	8.50	49.5	1256	12.4	314	37	30	145/1000	21450/9750	178A5
14.00R24	★★★	TT	10.00W	53.7	1364	14.7	374	48	38	145/1000	33020/14950	193A5
14.00R24	★★★	TL	10.00W	53.9	1369	14.9	378	48	38	145/1000	33020/14950	193A5

* Load ratings for counterbalanced industrial cyclic application. Please contact a MAXAM representative for other applications.





MAXAM

MS407

PORTXTRA IND-4

All-steel radial industrial tires designed for heavy loads and long cycle times in port and marina applications. Belt-stabilized tread provides better traction, longer tread life and lower heat build up than bias construction tires.

- Belt-stabilized tread provides better traction and wear performance
- Extra wide profile and reinforced sidewall for improved stability
- Tread pattern designed to maximize tread life
- Cut and wear resistant compound
- High quality casing allows for excellent retreadability

Applications



Size	Rating	Type	Rim	O.D.		S.W.		T.D.		Infl. P.	L.C.C. (lbs/kg)	L.I.
				in	mm	in.	mm	32nds	mm			
10.00R20	★★★	TT	7.50	41.9	1064	11.2	285	44	35	145/1000	15210/6890	166A5
12.00R20	★★★	TT	8.50	44.8	1138	11.8	299	52	41	145/1000	20410/9230	176A5
12.00R24	★★★	TT	8.50	49.4	1255	12.5	317	52	41	145/1000	21450/9750	178A5
14.00R24	★★★	TT	10.00W	55.6	1411	15.0	380	77	61	145/1000	33020/14950	193A5
14.00R24	★★★	TL	10.00W	55.6	1413	15.0	382	77	61	145/1000	33020/14950	193A5
14.00R25	★★★	TL	10.00/1.5	55.7	1415	14.8	377	78	62	145/1000	33020/14950	193A5
18.00R25	★★★	TL	13.00/2.5	64.8	1645	19.7	500	81	65	145/1000	50180/22750	207A5

* Load ratings for counterbalanced industrial cyclic application. Please contact a MAXAM representative for other applications.







MAXAM
FORESTRY TIRES



MAXAM MS930

LOGXTRA - LS2 FORESTRY

Designed for use on demanding forestry equipment. High strength, belt-stabilized tire construction provides excellent traction and flotation in severe logging applications.

- Heavy duty shoulder and sidewall
- Maximum protection from cuts, impacts and punctures
- Cut resistant compound specifically engineered for forestry service
- Steel reinforced undertread
- Extra wide footprint provides exceptional flotation in muddy and wet ground conditions
- Nylon-wrapped beads prevent unwinding

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5mph 10kph	
28L-26	16	TL	DW25B	64.7 1644	28.1 714	72 57	35 240	14800 6700	174A2 / 162A6
	20	TL	DW25B	64.2 1632	27.9 709	72 57	40 275	16100 7300	177A2 / 165A6
	26	TL	DW25B	64.7 1644	28.1 714	72 57	55 380	20400 9250	185A2 / 173A6
24.5-32	20	TL	DH21	72.1 1831	24.5 622	76 60	45 310	18700 8500	182A2 / 170A6
30.5L-32	20	TL	DH27	72.7 1847	30.5 775	76 60	35 240	18700 8500	182A2 / 170A6
	26	TL	DH27	72.7 1847	30.2 768	76 60	45 310	22000 10000	188A2 / 176A6
	32	TL	DH27	72.7 1847	30.2 775	76 60	55 380	24700 11200	192A2 / 180A6
35.5L-32	26	TL	DH31	79.3 2016	35.2 895	79 63	40 275	26800 12150	195A2 / 183A6
	30	TL	DH31	79.2 2011	35.5 902	79 63	45 310	29100 13200	198A2 / 186A6





MAXAM MS931

LOGXTRA - LS2 FORESTRY

Designed for use on demanding forestry equipment. High strength, belt stabilized tire construction provides excellent traction and flotation in severe logging applications.

- Heavy duty shoulder and sidewall
- Maximum protection from cuts, impacts and punctures
- Cut resistant compound specifically engineered for forestry service
- Steel reinforced undertread
- Extra wide footprint provides exceptional flotation in muddy and wet ground conditions
- Nylon-wrapped beads prevent unwinding

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)	L.I.
				in mm	in mm	32nds mm	psi KPa	5 mph 10 kph	
23.1-26	16	TL	DW20B	63.8 1620	22.8 580	72 58	40 275	13900 6300	172A2 / 160A6
28L-26	16	TL	DW25B	63.9 1624	28.0 710	76 60	35 240	14800 6700	174A2 / 162A6
	20	TL	DW25B	64.1 1628	27.8 707	76 60	40 275	16100 7300	177A2 / 165A6
	26	TL	DW25B	64.1 1628	27.8 707	76 60	55 380	20400 9250	185A2 / 173A6
24.5-32	20	TL	DH21	72.1 1831	24.5 622	75 60	45 310	18700 8500	182A2 / 170A6
30.5L-32	20	TL	DH27	73.0 1855	30.3 769	82 65	35 240	18700 8500	182A2 / 170A6
	26	TL	DH27	73.0 1855	30.2 768	82 65	45 310	22000 10000	188A2 / 176A6
	32	TL	DH27	73.0 1855	30.2 768	82 65	55 380	24700 11200	192A2 / 180A6
	26	TL	DH31	79.2 2011	35.5 902	84 67	40 275	26800 12150	195A2 / 183A6
35.5L-32	30	TL	DH31	79.2 2011	35.5 902	84 67	45 310	29100 13200	198A2 / 186A6





MAXAM

MS933

LOGXTRA - HIGH FLOTATION HF4

Designed for use on demanding forestry equipment. High strength, belt stabilized tire construction provides excellent traction and flotation in severe logging applications.

- Heavy duty shoulder and sidewall
- Maximum protection from cuts, impacts and punctures
- Cut resistant compound specifically engineered for forestry service
- Steel reinforced undertread
- Extra wide footprint provides exceptional flotation in muddy and wet ground conditions
- Nylon-wrapped beads prevent unwinding

Applications:



Size	P.R.	Type	Rim	O.D.	S.W.	T.D.	Infl. P.	L.C.C. (lbs/kg)		L.I.
				in mm	in mm	32nds mm		5mph 10kph	30mph 50kph	
66x43.00-25	20	TL	36.0TH	68.8 1748	40.9 1040	120 95	50 340	23400 10600	14800 6700	174B
66x43.00-26	20	TL	DW36B	68.8 1748	40.9 1040	120 95	50 340	23400 10600	14800 6700	174B
67x34.00-25	20	TL	30.0TH	69.9 1775	33.9 861	120 95	55 380	25400 11500	16100 7300	177B
67x34.00-26	20	TL	DW30B	69.9 1775	33.9 861	120 95	55 380	24700 11200	15700 7100	176B
73x44.00-32	20	TL	DH36	75.3 1913	44.0 1118	96 76	50 350	27600 12500	17600 8000	180B
73x50.00-32	20	TL	DH44	76.5 1943	50.0 1270	96 76	45 310	26800 12150	17100 7750	179B





Load and Inflation Pressure Charts

MSV01 - Highway Service

Metric tires for mobile cranes and other specialty equipment. Maximum speed 50mph (80km/h) - speed symbol F

Size	Tire Load Limits at Various Cold Inflation Pressures							
psi	105	109	112	116	120	123	127	130
kPa	725	750	775	800	825	850	875	900
14.00R24 (385/95R24)	11000 5000	11400 5150	11700 5300	12000 5450	12300 5600	12800 5800	12800 5800	13200 (170) 6000 (170)
14.00R25 (385/95R25)	11000 5000	11400 5150	11700 5300	12000 5450	12300 5600	12800 5800	12800 5800	13200 (170) 6000 (170)
16.00R25 (445/95R25)	12300 5600	12800 5800	13200 6000	13600 6150	13900 6300	14300 6500	14300 6500	14800 (174) 6700 (174)
20.5R25 (525/80R25)	16100 (177) 7300 (177)	- -	- -	- -	- -	- -	- -	- -

MS202, MS203, MS300, MS301, MS302, MS405, MS406

Off-The-Road slow speed service - conventional/wide base ply radial tires. Maximum speed 5mph (10km/h) - speed symbol A2

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures								
psi		65	69	73	76	80	83	87	91	94
kPa		450	475	500	525	550	575	600	625	650
14.00R24	★	13600	13900	14300	14800	15200 (*)	-	-	-	-
		6150	6300	6500	6700	6900 (*)	-	-	-	-
15.5R25	★★	12000	12300	12800 (*)	13600	13900	14300	14800	15200	15700 (**)
		5450	5600	5800 (*)	6150	6300	6500	6700	6900	7100 (**)
17.5R25	★★	14300	14800	15700 (*)	16100	16500	17100	17600	18200	18700 (**)
		6500	6700	7100 (*)	7300	7500	7750	8000	8250	8500 (**)
20.5R25	★★	19300	19800	20900 (*)	21500	22000	22700	24000	24700	25400 (**)
		8750	9000	9500 (*)	9750	10000	10300	10900	11200	11500 (**)
23.5R25	★★	24700	25400	26800 (*)	27600	28300	29100	30000	30900	32000 (**)
		11200	11500	12150 (*)	12500	12850	13200	13600	14000	14500 (**)
26.5R25	★★	30900	32000	33100 (*)	34200	35300	36400	37500	39700	40800 (**)
		14000	14500	15000 (*)	15500	16000	16500	17000	18000	18500 (**)
29.5R25	★★	37500	38600	39700 (*)	41900	43000	44100	45400	46700	49400 (**)
		17000	17500	18000 (*)	19000	19500	20000	20600	21200	22400 (**)
29.5R29	★★	39700	40800	43000 (*)	44100	45400	46700	49400	50700	52000 (**)
		18000	18500	19500 (*)	20000	20600	21200	22400	23000	23600 (**)
35/65R33	★★	46700	49400	50700 (*)	52000	55100	56800	58400	60000	61500 (**)
		21200	22400	23000 (*)	23600	25000	25750	26500	27250	28000 (**)

Off-The-Road haulage service - conventional/wide base ply radial tires. Maximum speed 30mph (50km/h) - speed symbol B

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures								
psi		47	51	54	58	62	65	69	73	76
kPa		325	350	375	400	425	450	475	500	525
14.00R24	★	-	-	-	8250	8550	8800	9100 (*)	-	-
		-	-	-	3750	3875	4000	4125 (*)	-	-
15.5R25	★★	6950	7400	7850 (*)	8050	8550	8800	9350	9650	9900 (**)
		3150	3350	3550 (*)	3650	3875	4000	4250	4375	4500 (**)
17.5R25	★★	8250	8800	9100 (*)	9650	10200	10500	11000	11400	12000 (**)
		3750	4000	4125 (*)	4375	4625	4750	5000	5150	5450 (**)
20.5R25	★★	11000	11700	12300 (*)	12800	13600	14300	14800	15200	16100 (**)
		5000	5300	5600 (*)	5800	6150	6500	6700	6900	7300 (**)
23.5R25	★★	14300	14800	15700 (*)	16500	17100	18200	18700	19800	20400 (**)
		6500	6700	7100 (*)	7500	7750	8250	8500	9000	9250 (**)
26.5R25	★★	17600	18700	19800 (*)	20900	21500	22700	23400	24700	25400 (**)
		8000	8500	9000	9500	9750	10300	10600	11200	11500 (**)
29.5R25	★★	21500	22700	24000 (*)	25400	26000	27600	28300	30000	30900 (**)
		9750	10300	10900 (*)	11500	11800	12500	12850	13600	14000 (**)
29.5R29	★★	22700	24000	25400 (*)	26800	27600	29100	30000	32000	33100 (**)
		10300	10900	11500 (*)	12150	12500	13200	13600	14500	15000 (**)
35/65R33	★★	26800	28300	30000 (*)	30900	33100	34200	35300	37500	38600 (**)
		12150	12850	13600 (*)	14000	15000	15500	16000	17000	17500 (**)

Off-The-Road slow speed service - "65 series" radial ply tires. Maximum speed 5mph (10km/h) - speed symbol A2

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures									
psi		58	62	65	69	73	76	80	83	87	91
kPa		400	425	450	475	500	525	550	575	600	625
550/65R25	★	16500 7500	17100 7750	18200 8250	18700 (*) 8500 (*)	- -	- -	- -	- -	- -	- -
650/65R25	★★	22000 10000	23400 10600	24000 10900	25400 (*) 11500 (*)	26000 11800	27600 12500	28300 15850	29100 13200	30000 13600	30900 (**) 14000 (**)
750/65R25	★★	29100 13200	30000 13600	32000 14500	33100 (*) 15000 (*)	34200 15500	35300 16000	36400 16500	37500 17000	38600 17500	40800 (**) 18500 (**)
775/65R29	★★	33100 15000	34200 15500	36400 16500	37500 (*) 17000 (*)	38600 17500	40800 18500	41900 19000	43000 19500	44100 20000	45400 (**) 20600 (**)
875/65R29	★★	40800 18500	43000 19500	45400 20600	46700 (*) 21200 (*)	48100 21800	50700 23000	52000 23600	53600 24300	55100 25000	56800 (**) 25750 (**)
											68000 (****) 30750 (****)

Load and Inflation Pressure Charts

MS202, MS203, MS300, MS301, MS302, MS405, MS406

Off-The-Road haulage service - "65 series" radial ply tires. Maximum speed 30mph (50km/h) - speed symbol B

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures							
psi		36	40	44	47	51	54	58	62
kPa		250	275	300	325	350	375	400	425
650/65R25	★★	12000	12900	13900	14700 (*)	15800	16300	16950	17600 (**)
		5450	5850	6300	6650 (*)	7150	7400	7700	8000 (**)
750/65R25	★★	15700	17100	18200	19300 (*)	20400	21500	22700	23400 (**)
		7100	7750	8250	8750 (*)	9250	9750	10000	10600 (**)
775/65R29	★★	18700	20400	21500	22700 (*)	24000	25400	26100	26800 (**)
		8500	9250	9750	10300 (*)	10900	11500	11850	12150 (**)
875/65R29	★★	22700	24700	26000	27600 (*)	29100	30900	32000	34200 (**)
		10300	11200	11800	12500 (*)	13200	14000	14500	15500 (**)

Subterranean Haulage service. Maximum speed 25mph (40km/h) - speed symbol A8

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures							
psi		87	91	94	98	102	105	109	112
kPa		600	625	650	675	700	725	750	775
35/65R33	★★★★	50700	52000	53600 (***)	55100	56800	58400	60000	61500
		23000	23600	24300 (***)	25000	25750	26500	27250	28000
									64000 (****)
									29000 (****)

MS303

Off-The-Road haulage service - wide base ply radial tires. Maximum speed 30mph (50km/h) - speed symbol B

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures							
psi		47	51	54	58	62	65	69	73
kPa		325	350	375	400	425	450	475	500
33.25R29	★★	28300	30000	30900 (*)	33100	34200	36400	37500	38600
		12850	13600	14000 (*)	15000	15500	16500	17000	17500
37.25R35	★★	36400	38600	40800 (*)	43000	45400	46700	49400	50700
		16500	17500	18500 (*)	19500	20600	21200	22400	23000
									52000 (**)
									23600 (**)

MS401+

Off-The-Road haulage service - Maximum speed 30mph (50km/h) - speed symbol B

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures							
psi		58	65	73	80	83	87	102	123
kPa		400	450	500	550	575	600	700	850
14.00R25	★★★	8250	9040	9900	10695	11245	11575	12800 (***)	14000
		3750	4100	4500	4850	5100	5250	5800 (***)	6350

MS401, MS402, MS403, MS440, MS453

Off-The-Road haulage service - conventional radial tires. Maximum speed 30mph (50km/h) - speed symbol B

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures											
psi		69	73	76	80	83	87	91	94	98	102	109	116
kPa		475	500	525	550	575	600	625	650	675	700	750	800
14.00R24	★★★★	9100 (*)	9650	9900	10200	10500	11000	11400	11700	12000	12300 (**)	12800 (***)	12800 (****)
		4125 (*)	4375	4500	4625	4750	5000	5150	5300	5450	5600 (**)	5800 (***)	5800 (****)
14.00R25	★★★★	9100 (*)	9650	9900	10200	10500	11000	11400	11700	12000	12300 (**)	12800 (***)	12800 (****)
		4125 (*)	4375	4500	4625	4750	5000	5150	5300	5450	5600 (**)	5800 (***)	5800 (****)
18.00R33	★★	17600 (*)	18700	19300	19800	20400	21500	22000	22700	23400	24000 (**)	-	-
		8000 (*)	8500	8750	9000	9250	9750	10000	10300	10600	10900 (**)	-	-
21.00R33	★★	22700 (*)	24000	24700	25400	26000	27600	28300	29100	30000	30900 (**)	-	-
		10300 (*)	10900	11200	11500	11800	12500	12850	13200	13600	14000 (**)	-	-
21.00R35	★★	23400 (*)	24700	25400	26000	27600	28300	29100	30000	30900	32000 (**)	-	-
		10600 (*)	11200	11500	11800	12500	12850	13200	13600	14000	14500 (**)	-	-
24.00R35	★★	30000 (*)	30900	32000	34200	35300	36400	37500	38600	39700	40800 (**)	-	-
		13600 (*)	14000	14500	15500	16000	16500	17000	17500	18000	18500 (**)	-	-
27.00R49	★★	44100 (*)	45400	48100	49400	50700	52000	55100	56800	58400	60000 (**)	-	-
		20000 (*)	20600	21800	22400	23000	23600	25000	25750	26500	27250 (**)	-	-
33.00R51	★★	64000 (*)	66000	68000	71500	74000	76000	78500	80500	82500	85500 (**)	-	-
		29000 (*)	30000	30750	32500	33500	34500	35500	36500	37500	38750 (**)	-	-
36.00R51	★★	78500 (*)	80500	82500	85500	88000	91000	93500	96500	99000	102000 (**)	-	-
		35500 (*)	36500	37500	38750	40000	41250	42500	43750	45000	46250 (**)	-	-
37.00R57	★★	85500 (*)	88000	91000	96500	99000	102000	104500	107500	110000	113500 (**)	-	-
		38750 (*)	40000	41250	43750	45000	46250	47500	48750	50000	51500 (**)	-	-
40.00R57	★★	99000 (*)	102000	107500	110000	113500	117000	120000	123500	128000	132500 (**)	-	-
		45000 (*)	46250	48750	50000	51500	53000	54500	56000	58000	60000 (**)	-	-
46/90R57	★★	-	-	-	117000	120000	123500	128000	132500	135500	139000	143500 (**)	-
		-	-	-	53000	54500	56000	58000	60000	61500	63000 (**)	-	-
50/80R57	★★	-	-	-	120000	123500	128000	132500	135500	139000	143500 (**)	152000	161000 (**)
		-	-	-	54500	56000	58000	60000	61500	63000	65000 (**)	69000	73000 (**)
53/80R63	★★	-	-	-	152000	156500	165500	171000	176500	176500	182000 (**)	-	-
		-	-	-	69000	71000	75000	77500	80000	80000	82500 (**)	-	-

Load and Inflation Pressure Charts

MS501, MS502, MS503

Off-The-Road slow speed service - wide base ply radial tires. Maximum speed 5mph (10km/h) - speed symbol A2

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures								
psi		65	69	73	76	80	83	87	91	94
kPa		450	475	500	525	550	575	600	625	650
17.5R25	★★	14300	14800	15700 (*)	16100	16500	17100	17600	18200	18700 (**)
		6500	6700	7100 (*)	7300	7500	7750	8000	8250	8500 (**)
20.5R25	★★	19300	19800	20900 (*)	21500	22000	22700	24000	24700	25400 (**)
		8750	9000	9500 (*)	9750	10000	10300	10900	11200	11500 (**)
23.5R25	★★	24700	25400	26800 (*)	27600	28300	29100	30000	30900	32000 (**)
		11200	11500	12150 (*)	12500	12850	13200	13600	14000	14500 (**)
26.5R25	★★	30900	32000	33100 (*)	34200	35300	36400	37500	39700	40800 (**)
		14000	14500	15000 (*)	15500	16000	16500	17000	18000	18500 (**)
29.5R25	★★	37500	38600	39700 (*)	41900	43000	44100	45400	46700	49400 (**)
		17000	17500	18000 (*)	19000	19500	20000	20600	21200	22400 (**)
29.5R29	★★	39700	40800	43000 (*)	44100	45400	46700	49400	50700	52000 (**)
		18000	18500	19500 (*)	20000	20600	21200	22400	23000	23600 (**)
35/65R33	★★	46700	49400	50700 (*)	52000	55100	56800	58400	60000	61500 (**)
		21200	22400	23000 (*)	23600	25000	25750	26500	27250	28000 (**)
875/65R29	★★	45400	46700 (*)	48100	50700	52000	53600	55100	56800 (**)	-
		20600	21200 (*)	21800	23000	23600	24300	25000	25750 (**)	-

Off-The-Road slow speed service - conventional radial ply tires. Maximum speed 5mph (10km/h) - speed symbol A2

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures										
psi		80	83	87	91	94	98	102	105	112	116	120
kPa		550	575	600	625	650	675	700	725	775	800	825
18.00R25	★★	26000 (*)	26800	27600	28300	29100	30000	30900	32000	33100	34200	35300 (**)
		11800 (*)	12150	12500	12850	13200	13600	14000	14500	15000	15500	16000 (**)

MS912, MS913 - Loader Bias

Off-The-Road haulage service -50 km/h (30mph)maximum speed wide base bias tires. Maximum speed 30mph (50km/h) - speed symbol B

Size	PR	Tire Load Limits at Various Cold Inflation Pressures									
psi		25	29	33	36	40	44	47	51	54	58
kPa		175	200	225	250	275	300	325	350	375	400
15.5-25	12	5680 (8)	6150	6600	7150 (12)	-	-	-	-	-	-
		2575 (8)	2800	3000	3250 (12)	-	-	-	-	-	-
17.5-25	12/16/20	6950	7400	8050 (12)	8550	3100	9350 (16)	9900	10200	10700	11000 (20)
		3150	3350	3650 (12)	3875	4125	4250 (16)	4500	4625	4875	5000 (20)
20.5-25	12/16/20	9100	9900 (12)	10700	11400	12000 (16)	12800	13200 (20)	-	-	-
		4125	4500 (12)	4875	5150	5450 (16)	5800	6000 (20)	-	-	-
23.5-25	16/20/28	11700 (12)	12800	13600 (16)	14300	15200	16100 (20)	17100	17600 (24)	18300	19300 (28)
		5300 (12)	5800	6150 (16)	6500	6900	7300 (20)	7750	8000 (24)	8300	8750 (28)
26.5-25	20/24/28	14800	16100	17100	18200 (20)	19300	20400 (24)	20900 (26)	22000 (28)	-	-
		6700	7300	7750	8250 (20)	8750	9250 (24)	9500 (26)	10000 (28)	-	-

Off-The-Road slow speed service -10 km/h (5mph) maximum speed wide base bias tires. Maximum speed 5mph (10km/h) - speed symbol A2

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		40	44	47	51	54	58	62	65	69	73	83
kPa		275	300	325	350	375	400	425	450	475	500	575
15.5-25	12	9900	10500	10700 (10)	11400	11700	12300 (12)	-	-	-	-	-
		4500	4750	4875 (10)	5150	5300	5600 (12)	-	-	-	-	-
17.5-25	12/16/20	11700	12300	12800	13600 (12)	13900	14800 (14)	15200	15700	16100 (16)	16500	18200 (20)
		5300	5600	5800	6150 (12)	6300	6700 (14)	6900	7100	7300 (16)	7500	8250 (20)
20.5-25	12/16/20	15700	16500	17100	18200 (16)	18700	19300	20400	20900 (20)	-	-	-
		7100	7500	7750	8250 (16)	8500	8750	9250	9500 (20)	-	-	-
23.5-25	16/20/28	19800	20900 (16)	22000	23400	24000 (20)	24700	26000	26800	27600 (24)	28200	30000 (28)
		9000	9500 (16)	10000	10600	10900 (20)	11200	11800	12150	12500 (24)	12800	13600 (28)
26.5-25	20/24/28	25400	26800	27600	29100 (20)	30000	30900 (24)	32000	33100 (26)	34200 (28)	-	-
		11500	12150	12500	13200 (20)	13600	14000 (24)	14500	15000 (26)	15500(28)	-	-

Load and Inflation Pressure Charts

MS900

Backhoe - Industrial Service. Maximum speed 25mph (40km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		24	28	32	36	40	44	48	52	56	60	64
kPa		165	190	220	250	275	300	330	360	385	415	440
11L-15SL	10	1390	1570	1710 (6)	1870	1980	2090 (8)	2200	2340 (10)	-	-	-
		360	710	775 (6)	850	900	950 (8)	1000	1060 (10)	-	-	-
11L-16SL	12	1480	1650	1760	1930	2090	2200 (8)	2340	24710 (10)	2540	2680	2760 (12)
		670	750	800	875	950	1000 (8)	1060	1120 (10)	1150	1215	1250 (12)
14.5/75-16.1SL	10	2270	2540	2760	3000	3200 (10)	-	-	-	-	-	-
		1030	1150	1250	1360	1450 (10)	-	-	-	-	-	-

MS901

Backhoe - Industrial Service. Reference speed 25 mph (40 km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		40	45	50	54	58	60	62	68	72		
kPa		275	310	345	370	400	415	430	470	490		
12.5/80-18 (340/80-18)	12/16	5050	5360 (10)	5680	5900	6000 (12)	6275	6400 (14)	6760	6950 (16)		
		2290	2430 (10)	2575	2675	2725 (12)	2845	2900 (14)	3065	3150 (16)		

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		18	20	22	24	26	28	30	32	36	38	42
kPa		125	140	150	170	180	190	210	220	250	260	290
14.9-24	12	3520	3740	4080	4300 (6)	4540	4800	5080 (8)	5200	-	-	6400 (12)
		1600	1700	1850	1950 (6)	2060	2180	2300 (8)	2360	-	-	2900 (12)
16.9-24	12	-	4680	4940 (6)	5200	5520	5840 (8)	6150	6400 (10)	6950	7150 (12)	-
		-	2120	2240 (6)	2360	2500	2650 (8)	2800	2900 (10)	3150	3250 (12)	-
18.4-28	12	-	5840 (6)	6400	6800 (8)	7150	7400	7850 (10)	8250	9100 (12)	-	-
		-	2650 (6)	2900	3075 (8)	3250	3350	3550 (10)	3750	4125 (12)	-	-

MS902

Backhoe - Industrial Service. Maximum speed 25mph (40km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		36	40	44	48	52	54	58	60	62		
kPa		250	275	310	330	360	370	400	415	430		
12.5/80-18 (340/80-18)	12/14	-	5050	5360 (10)	5540	5780	5900	6000 (12)	6270	6400 (14)		
		-	2290	2430 (10)	2500	2620	2675	2725 (12)	2845	2900 (14)		
15.5/80-24 (400/80-24)	12/14/16	7400 (10)	7790	8250 (12)	8575	8800 (14)	9160	9650 (16)	-	-		
		3350 (10)	3530	3750 (10)	3890	4000 (14)	4155	4375 (16)	-	-		

Size	PR	Free Rolling					Drive Wheel				
psi		33	40	48	55		33	40	48	55	
kPa		230	275	330	380		230	275	330	380	
16.5/85-24	12/14/16	-	10500 (12)	11400 (14)	12300 (16)	-	-	7400 (12)	8050 (14)	8800 (16)	
		-	4750 (12)	5150 (14)	5600 (16)	-	-	3350 (12)	3650 (14)	4000 (16)	
16.5/85-28	10	8800 (10)	9650 (12)	-	-	6150 (10)	6800 (12)	-	-	-	
		4000 (10)	4375 (12)	-	-	2800 (10)	3075 (12)	-	-	-	

MS903

Reference speed 25 mph (40 km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures									
psi		23	26	29	32	35	38	42	44/45		
kPa		160	180	200	220	250	260	290	300/310		
18.4-26 (480/80-26)	12/16	-	7710	8040 (10)	8370	8800 (12)	9180	9930	10500 (16)		
		-	3500	3650 (10)	3795	4000 (12)	4160	4500	4750 (16)		
16.9-28 (440/80-28)	12/14	6200	6400 (8)	6600	6800 (10)	7325	7850 (12)	8130	8550 (14)		
		2810	2900 (8)	3000	3075 (10)	3320	3550 (12)	3690	3785 914)		
16.9-30 (420/85-30)	12/14	-	-	6715	7160 (10)	7605	8050 (12)	8550	8800 (14)		
		-	-	3045	3200 (10)	3450	3650 (12)	3880	4000 (14)		
18.4-30 (460/85-30)	12/14	-	8375	8700 (10)	9025	9350 (12)	9585	9900 (14)	-		
		-	3800	3950 (10)	4090	4250 (12)	4350	4500 (14)	-		

Load and Inflation Pressure Charts

MS904

Backhoe - Industrial Service. Reference speed 25 mph (40 km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		20	22	24	26	28	30	32	34	38	42	46
kPa		140	150	170	180	190	210	220	230	260	290	320
17.5L-24 (460/70-24)	10/12/16	4400 (6)	4680	5080	5360 (8)	5520	5840	6150 (10)	6480	7150 (12)	7975	8800 (16)
19.5L-24 (500/70-24)	12/16	2000 (6)	2120	2300	2430 (8)	2500	2650	2800 (10)	2940	3250 (12)	3615	4000 (16)
		5200	5680	6000 (8)	6400	6600 (10)	6950	7400	7600 (12)	8350	9100 (16)	-
		2360	2575	2725 (8)	2900	3000 (10)	3150	3350	3450 (12)	3790	4125 (16)	-
21L-24	12	6150	6600	6950	7400 (10)	7850	8050	8550 (12)	-	-	-	-
		2800	3000	3150	3350 (10)	3550	3650	3875 (12)	-	-	-	-

MS905, MS915

Off-the-road grader service - 25 mph (40 km/h) maximum speed A8, conventional (bias) tires

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		18	22	25	29	33	36	40	44	47	51	58
kPa		125	150	175	200	225	250	275	300	325	350	400
13.00-24	12/14/16	3740	4180	4540 (8)	4940	5200 (10)	5520	5840	6000 (12)	6400	6600 (14)	7150 (16)
		1700	1900	2060 (8)	2240	2360 (10)	2500	2650	2725 (12)	2900	3000 (14)	3250 (16)
14.00-24	12/16	4540	5080	5520	5840	6150 (10)	6800 (12)	7150	7600	7850	8050 (16)	-
		2060	2300	2500	2650	2800 (10)	3075 (12)	3250	3450	3550	3650 (16)	-

MS906, MS916 – Skid Steer

Diagonal (bias) tires used in construction equipment service. Reference speed 5 mph (10 km/h) - speed symbol A2

Size	PR	Tire Load Limits at Various Cold Inflation Pressures												
psi		30	35	40	45	50	55	60	65	70	75	80	85	100
kPa		120	240	280	310	340	380	410	450	480	520	550	600	690
5.70-12	4	965	1060	1140	1120	1300	1380	1450 (4)	-	-	-	-	-	-
		440	480	515	555	590	625	660 (4)	-	-	-	-	-	-
23x8.50-12	6/8/12	1340	1470 (4)	1590	1700	1810 (6)	1930	2040	-	2400	-	-	-	-
		610	665 (4)	720	770	820 (6)	875	925	-	1090	-	-	-	-
27x8.50-15	8	1930 (4)	2090	2260	2480 (6)	2600	2780	2910 (8)	-	-	-	-	-	-
		875 (4)	950	1025	1125 (6)	1180	1260	1320 (8)	-	-	-	-	-	-
27x10-12	14	-	-	-	-	-	-	-	-	-	6200	6330	7165 (12)	7800 (14)
		-	-	-	-	-	-	-	-	-	2815	2870	3250 (12)	3540 (14)
7.00-15	6/8	2120	2320	2510 (4)	2690	2860	3030	3180 (6)	3420	3640 (8)	-	-	-	-
		960	1050	1140 (4)	1220	1295	1375	1440 (6)	1550	1650 (8)	-	-	-	-
31x15.50-15	8	3400 (6)	3700	4015	4400 (8)	-	-	-	-	-	-	-	-	-
		1540 (6)	1680	1820	1995 (8)	-	-	-	-	-	-	-	-	-
10-16.5	10	2760 (4)	3020	3260	3500 (6)	3720	3930	4140 (8)	4340	4540	4710 (10)	-	-	-
		1250 (4)	1370	1480	1590 (6)	1685	1785	1880 (8)	1970	2060	2135 (10)	-	-	-
12-16.5	12	3560	3900	4220 (6)	4520	4810 (8)	5080	5340	5600 (10)	5840	6150	6320 (12)	-	-
		1615	1770	1915 (6)	2050	2180 (8)	2305	2420	2540 (10)	2650	2800	2865 (12)	-	-
14-17.5	14	4820 (6)	5260	5700 (8)	6100	6500	6850 (10)	7220	7650 (12)	8050	8250	8540 (14)	-	-
		2185 (6)	2385	2585 (8)	2765	2950	3105 (10)	3275	3430 (12)	3650	3750	3875 (14)	-	-
15-19.5	14/16	6130	6710	7250 (8)	7770	8260	8740	9190 (12)	9630	10060 (14)	10500	10880 (16)	-	-
		2780	3045	3290 (8)	3525	3745	3965	4170 (12)	4370	4565 (14)	4750	4935 (16)	-	-

MS907 - L5 Skid Steer & Backhoe

Diagonal (bias) tires used in construction equipment service

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		35	40	45	50	55	60	65	75	80	90	105
kPa		240	280	310	340	380	410	450	520	550	620	725
23x8.50-12	8	1470 (4)	1590	1700	1810 (6)	1930	2040	2150 (8)	-	-	-	-
		665 (4)	720	770	820 (6)	875	925	975 (8)	-	-	-	-
27x8.50-15	10	2090	2260	2480 (6)	2600	2780	2910 (8)	3040	3300 (10)	-	-	-
		950	1025	1125 (6)	1180	1260	1320 (8)	1380	1500 (10)	-	-	-
10-16.5	14	3020	3260	3500 (6)	3720	3930	4140 (8)	4340	4710 (10)	4940	5240 (12)	5680 (14)
		1370	1480	1590 (6)	1685	1785	1880 (8)	1970	2135 (10)	2240	2375 (12)	2575 (14)
12-16.5	14	3900	4220 (6)	4520	4810 (8)	5080	5340	5600 (10)	5840	6320 (12)	6780 (14)	-
		1770	1915 (6)	2050	2180 (8)	2305	2420	2540 (10)	2650	2865 (12)	3075 (14)	-
14-17.5	16	5260	5700 (8)	6100	6500	6850 (10)	7220	7650 (12)	8050	8540 (14)	9100 (16)	-
		2385	2585 (8)	2765	2950	3105 (10)	3275	3430 (12)	3650	3875 (14)	4125 (16)	-

Reference speed 25 mph (40 km/h) - speed symbol A8

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
psi		28	30	32	36	38	40	45	48	58	62	72
kPa		190	210	220	250	260	330	330	330	400	430	490
12.5/80-18	14/16	-	-	-	-	-	5050	5360 (10)	5680	6000 (12)	6400 (14)	6950 (16)
		-	-	-	-	-	2290	2430 (10)	2575	2725 (12)	2900 (14)	3150 (16)
16.9-28	14	6150 (8)	6600	6800 (10)	7400	7850 (12)	7990	8340	8550 (14)	-	-	-
		2800 (8)	3000	3075 (10)	3350	3550 (12)	3625	3780	3875 (14)	-	-	-

Load and Inflation Pressure Charts

MS908 - Wheeled Excavator

Reference speed 30 mph (50 km/h) - speed symbol B

Size	PR	Tire Load Limits at Various Cold Inflation Pressures					
		70	75	85	90	97	105
psi							
kPa		480	520	590	620	670	725
8.25-20	14	-	-	4580	4670 (12)	4800	4940 (14)
		-	-	2080	2120 (12)	2180	2240 (14)
9.00-20	14	-	-	4680	4940 (10)	5360	5520 (14)
		-	-	2120	2240 (10)	2430	2500 (14)
10.00-20	16	5440	5680 (12)	6150	6400 (14)	6600	6950 (16)
		2470	2575 (12)	2800	2900 (14)	3000	3150 (16)
11.00-20	16	-	-	-	6150	6855	7400 (16)
		-	-	-	2800	3110	3350 (16)

MS909 - Multipurpose

Reference speed 30 mph (50 km/h) - speed symbol B

Size	PR	Tire Load Limits at Various Cold Inflation Pressures										
		36	40	44	48	51	55	58	64	72	85	100
psi												
kPa		250	280	300	350	350	380	400				
405/70-20 (16/70-20)	12/14/16	5680 (10)	6090	6400 (12)	6795	7150 (14)	7500	7850 (16)	-	-	-	-
		2575 (10)	2760	2900 (12)	3080	3250 (14)	3400	3550 (16)	-	-	-	-
405/70-24 (16/70-24)	14/16	-	-	-	7000	7375	7650	7850 (14)	8250	8800 (16)	-	-
		-	-	-	3170	3345	3470	3550 (14)	3750	4000 (16)	-	-
445/65-19.5 (18-19.5)	16/18	-	-	-	-	-	-	-	8360	8950	9900 (16)	11000 (18)
		-	-	-	-	-	-	-	3790	4060	4500 (16)	5000 (18)
445/65-22.5 (18-22.5)	16/18	-	-	-	-	-	-	-	8880	9570	10700 (16)	12000 (18)
		-	-	-	-	-	-	-	4030	4340	4875 (16)	5450 (18)

MS922 - Paver bias E-7

Maximum speed 5mph (10km/h) - speed symbol A2

Size	PR	Tire Load Limits at Various Cold Inflation Pressures							
		54	58	63	69	73	78	80	83
psi									
kPa		375	400	435	475	500	525	550	575
14.00-20	12/14	11560	12000 (12)	12500	13200 (14)	-	-	-	-
		5240	5450 (12)	5670	6000 (14)	-	-	-	-
18.00-25	16/20	21720	22700 (16)	23930	25400 (20)	-	-	-	-
		9850	10300 (16)	10850	11500 (20)	-	-	-	-
21.00-25	28	-	-	-	-	33100 (24)	34200	35300	36400 (28)
		-	-	-	-	15000 (24)	15500	16000	16500 (28)

MS938 - Compactor bias R-3

Maximum speed 25mph (40km/h) - speed symbol A8

Size	PR	COLD INFL. PRESS.		MAXIMUM CYCLIC LOAD		ROAD TRANSPORT	
		psi		lbs	lbs	lbs	
		kPa		kg	kg	kg	
23.1-26	12	32		13400	12200	8550	
		220		6100	5520	3875	
28L-26	16	36		17000	15500	10500	
		250		7710	7010	4750	

Load and Inflation Pressure Charts

MS801

Diagonal (bias) ply-industrial tires operated only on smooth floors and runways

Size	PR	Infl. Press	Counterbalanced Lift Trucks				Industrial Vehicles (Continuous Service)				Load Index
			Load Wheel		Steer Wheel						
		psi	15mph	22mph	15mph	22mph	5 mph	15 mph	25 mph	30 mph	Industrial
		kPa	25kph	35kph	25kph	35kph	10 kph	25 kph	40 kph	50 kph	Service
18x7-8	14	130	4160	4000	3200	2960	4160	3200	2850	2690	121A5
		900	1885	1815	1450	1340	1885	1450	1290	1220	
	16	145	4730	4550	3640	3365	4730	3640	3240	3060	125A5
		1000	2145	2065	1650	1525	2145	1650	1470	1385	
5.00-8	10	145	3120	3000	2400	2220	3120	2400	2135	2015	111A5
		1000	1415	1365	1090	1010	1415	1090	970	915	
6.00-9	10	125	3785	3640	2910	2690	3785	2910	2590	2445	118A5
		850	1715	1650	1320	1220	1715	1320	1175	1110	
	12	145	4160	4000	3200	2960	4160	3200	2850	2690	121A5
		1000	1885	1815	1450	1340	1885	1450	1290	1220	
23x9-10	18	130	6970	6700	5360	4960	6970	5360	4770	4500	139A5
		900	3160	3040	2430	2250	3160	2430	2165	2040	
	20	145	7590	7300	5840	5400	7590	5840	5200	4905	142A5
		1000	3445	3315	2650	2450	3445	2650	2360	2225	
6.50-10	10	115	4290	4125	3300	3055	4290	3300	2935	2770	122A5
		790	1950	1875	1500	1390	1950	1500	1335	1260	
	12	140	4730	4550	3640	3365	4730	3640	3240	3060	125A5
		970	2145	2065	1650	1525	2145	1650	1470	1385	
23x10-12	16	115	6970	6700	5360	4960	6970	5360	4770	4500	139A5
		790	3160	3040	2430	2250	3160	2430	2165	2040	
	20	145	8320	8000	6400	5920	8320	6400	5695	5375	145A5
		1000	3770	3625	2900	2685	3770	2900	2580	2435	
7.00-12	12	125	5900	5675	4540	4200	5900	4540	4040	3815	133A5
		860	2680	2575	2060	1905	2680	2060	1835	1730	
	14	145	6085	5850	4680	4330	6085	4680	4165	3930	134A5
		1000	2755	2650	2120	1960	2755	2120	1885	1780	
27x10-12	16	115	8580	8250	6600	6105	8580	6600	5875	5545	146A5
		790	3900	3750	3000	2775	3900	3000	2670	2520	
	18	130	9295	8940	7150	6615	9295	7150	6365	6005	149A5
		900	4225	4065	3250	3005	4225	3250	2895	2730	
	20	145	10205	9815	7850	7260	10205	7850	6985	6595	152A5
		1000	4615	4440	3550	3285	4615	3550	3160	2980	
8.15-15 (28x9-15)	14	140	8580	8250	6600	6105	8580	6600	5875	5545	146A5
		970	3900	3750	3000	2775	3900	3000	2670	2520	
250-15	18	138	10465	10065	8050	7445	10465	8050	7165	6760	153A5
		950	4745	4565	3650	3375	4745	3650	3250	3065	
	20	145	11115	10690	8550	7910	11115	8550	7610	7180	155A5
		1000	5040	4845	3875	3585	5040	3875	3450	3255	
7.00-15	14	135	7385	7100	5680	5255	7385	5680	5055	4770	141A5
		930	3350	3220	2575	2380	3350	2575	2290	2165	
7.50-15	14	135	7995	7690	6150	5690	7995	6150	5475	5165	144A5
		930	3640	3500	2800	2590	3640	2800	2490	2350	
8.25-15	14	120	9295	8940	7150	6615	9295	7150	6365	6005	149A5
		830	4225	4065	3250	3005	4225	3250	2895	2730	
300-15	20	135	14300	13750	11000	10175	14300	11000	9790	9240	164A5
		930	6500	6250	5000	4625	6500	5000	4450	4200	
	22	145	14820	14250	11400	10545	14820	11400	10145	9575	165A5
		1000	6695	6440	5150	4765	6695	5150	4585	4325	
9.00-20	12	130	12870	12375	9900	9160	12870	9900	8810	8315	160A5
		900	5850	5625	4500	4165	5850	4500	4005	3780	
10.00-20	16	130	14300	13750	11000	10175	14300	11000	9790	9240	164A5
		900	6500	6250	5000	4625	6500	5000	4450	4200	
11.00-20	18	145	17160	16500	13200	12210	17160	13200	11750	11090	170A5
		1000	7800	7500	6000	5550	7800	6000	5340	5040	
12.00-20	24	145	20410	19625	15700	14525	20410	15700	13975	13190	176A5
		1000	9230	8875	7100	6570	9230	7100	6320	5965	
	28	150	20930	20125	16100	14895	20930	16100	14330	13525	177A5
		1030	9490	9125	7300	6755	9490	7300	6495	6130	
12.00-24	20	145	21450	20625	16500	15265	18185	13400	-	-	178A5
		1000	9750	9375	7500	6940	8250	6080	-	-	
14.00-24	28	145	28600	27500	22000	20350	24470	18030	-	-	188A5
		1000	13000	12500	10000	9250	11100	8180	-	-	

Load and Inflation Pressure Charts

MS802 - Ground Support Equipment

Diagonal (bias) ply-industrial tires operated only on smooth floors and runaways

Size	PR	Infl. Press	Counterbalanced Lift Trucks				Industrial Vehicles (Continuous Service)				Load Index
			Load Wheel		Steer Wheel						
		psi	15mph	22mph	15mph	22mph	5 mph	15 mph	25 mph	30 mph	Industrial Service
		kPa	25kph	35kph	25kph	35kph	10 kph	25 kph	40 kph	50 kph	
18x7-8	16	145	4730	4550	3640	3365	4730	3640	3240	3060	125A5
		1000	2145	2065	1650	1525	2145	1650	1470	1385	
6.00-9 (6.90-9)	10	125	3785	3640	2910	2690	3785	2910	2590	2445	118A5
		850	1715	1650	1320	1220	1715	1320	1175	1110	
	12	145	4160	4000	3200	2960	4160	3200	2850	2690	121A5
1000	1885	1815	1450	1340	1885	1450	1290	1220			
6.50-10	14	145	4730	4550	3640	3365	4730	3640	3240	3060	125A5
		1000	2145	2065	1650	1525	2145	1650	1470	1385	
23x9-10	20	145	7590	7300	5840	5400	7590	5840	5200	4905	142A5
		1000	3445	3315	2650	2450	3445	2650	2360	2225	
7.00-12	16	145	6420	6175	4940	4570	6420	4940	4395	4150	136A5
		1000	2910	2800	2240	2070	2910	2240	1995	1880	
165-13	8	65	-	-	-	-	2290	1760	1565	1480	100A5
		450	-	-	-	-	1040	800	710	670	
7.00-15	14	135	7385	7100	5680	5255	7385	5680	5055	4770	141A5
		930	3350	3220	2575	2380	3350	2575	2290	2165	
7.50-15	16	145	8580	8250	6600	6105	8580	6600	5875	5545	146A5
		1000	3900	3750	3000	2775	3900	3000	2670	2520	
8.25-15	14	115	9295	8940	7150	6615	9295	7150	6365	6005	149A5
		790	4225	4065	3250	3005	4225	3250	2895	2730	
8.00-16.5	8	65	-	-	-	-	4860	3740	3330	3140	126A5
		450	-	-	-	-	2210	1700	1515	1430	
8.75-16.5	10	75	-	-	-	-	6240	4800	4270	4030	135A5
		520	-	-	-	-	2835	2180	1940	1830	
	12	95	-	-	-	-	7175	5520	4915	4635	140A5
		650	-	-	-	-	3250	2500	2225	2100	

MS307/MS407

Maximum speed 15mph (25km/h) - speed symbol A5

Size	Rating	Tire Load Limits at Various Cold Inflation Pressures (lbs/kg)										Load Index
		Load Wheel					Steer Wheel					
psi		87	102	116	131	145	87	102	116	131	145	
kPa		600	700	800	900	1000	600	700	800	900	1000	
10.00R20	-	10890	11930	12980	14080	15190	8380	9170	9990	10820	11700	166A5
		4940	5410	5890	6385	6890	3800	4160	4530	4910	5300	
12.00R20	★★★	14615	15920	17480	18915	20350	11240	12235	13450	14550	15700	176A5
		6630	7220	7930	8580	9230	5100	5550	6100	6600	7100	
12.00R24	★★★	14615	16335	18055	19775	21495	11245	12570	13890	15200	16500	178A5
		6630	7410	8190	8970	9750	5100	5700	6300	6900	7500	
14.00R24/25	★★★	23790	26170	28660	30950	32960	18300	20130	22000	23810	25400	193A5
		10790	11870	13000	14040	14950	8300	9130	10000	10800	11500	
18.00R25	★★★	35120	38560	42280	46140	50155	27000	29650	32520	35495	38600	207A5
		15930	17490	19180	20930	22750	12250	13450	14750	16100	17500	

Size	Rating	Cold Inflation Pressure	Counterbalanced Lift Trucks							Load Index
			Load Wheel		Steer Wheel		Industrial Cyclic			
		psi	15mph	22mph	15mph	22mph	Static	15 mph	22 mph	Industrial Service
		kPa	25kph	35kph	25kph	35kph	Static	25 kph	35 kph	
10.00R20	-	145	15190	14620	11700	10820	17660	11700	10820	166A5
		1000	6890	6630	5300	4910	8010	5300	4910	
12.00R20	★★★	145	20350	19580	15700	14525	23660	15700	14525	176A5
		1000	9230	8880	7100	6570	10730	7100	6570	
12.00R24	★★★	145	21495	20680	16500	15300	24980	16500	15300	178A5
		1000	9750	9380	7500	6940	11330	7500	6940	
14.00R24/25	★★★	145	32960	-	25400	-	38300	25400	-	193A5
		1000	14950	-	11500	-	17370	11500	-	
18.00R25	★★★	145	50160	-	38600	-	-	38600	-	207A5
		1000	22750	-	17500	-	-	17500	-	

Load and Inflation Pressure Charts

MS803/MS804

Diagonal (bias) ply-industrial tires operated only on smooth floors and runaways

Size	PR	Infl. Press	Counterbalanced Lift Trucks				Industrial Vehicles (Continuous Service)			Load Index
			Load Wheel		Steer Wheel					
		psi	15mph	22mph	15mph	22mph	5 mph	15 mph	22 mph	Industrial Service
		kPa	25kph	35kph	25kph	35kph	10 kph	25 kph	35 kph	
12.00-20	20	145 1000	20410 9230	19625 8875	15700 7100	14525 6570	20410 9230	15700 7100	14525 6570	176A5
14.00-24	28	145 1000	28600 13000	27500 12500	22000 10000	20350 9250	28600 13000	22000 10000	20350 9250	188A5
16.00-25	32	145 1000	35880 16250	34500 15625	27600 12500	25530 11565	35880 16250	27600 12500	25530 11565	196A5
18.00-25	40	145 1000	50180 22750	48250 21875	38600 17500	35705 16190	50180 22750	38600 17500	35705 16190	207A5
18.00-33	40	145 1000	60710 27560	58375 26500	46700 21200	43200 19610	60710 27560	46700 21200	43200 19610	214A5

MS930, MS931, LOGXTRA - Forestry Bias LS-2

Logging or forestry service other than on cable or grapple skidders tires used as singles. Maximum speed 20mph (30km/h) - speed symbol A6

Size	PR	Tire Load Limits at Various Cold Inflation Pressures					
		20	25	30	35	40	50
psi							
kPa		14	170	210	240	275	340
23.1-26	16	7150 (10) 3250 (10)	8250 3750	9100 (14) 4125 (14)	9900 (16) 4500 (16)	- -	- -
28L-26	16/20/26	8250 (12) 3750 (12)	9350 (14) 4250 (12)	10500 (16) 4750 (16)	11400 (20) 5150 (20)	12430 5640	14300 (26) 6500 (26)
24.5-32	20	8800 4000	9900 (12) 4500 (12)	11000 (16) 5000 (16)	12000 (18) 5450 (18)	12800 (20) 5800 (20)	- -
30.5L-32	20/26/32	10500 (12) 4750 (12)	11700 (16) 5300 (16)	13200 (20) 6000 (20)	14300 6500	15700 (26) 7100 (26)	17600 (32) 8000 (32)
35.5L-32	20/26/30	13900 (16) 6300 (16)	16100 (20) 7300 (20)	17600 8000	19300 (26) 8750 (26)	20900 (30) 9500 (30)	- -

Cable or grapple skidder tires used as singles. Maximum speed 5mph (10km/h) - speed symbol A2

Size	PR	Tire Load Limits at Various Cold Inflation Pressures					
		25	30	35	40	45	55
psi							
kPa		170	210	240	275	310	380
23.1-26	16	10000 (10) 4540 (10)	11600 5260	12700 (14) 5760 (14)	13900 (16) 6300 (16)	- -	- -
28L-26	16/20/26	11600 (12) 5260 (12)	13100 (14) 5940 (14)	14700 (16) 6650 (16)	16000 (20) 7300 (20)	17600 8000	20400 (26) 9250 (26)
24.5-32	20	12300 5580	13900 (12) 6300 (12)	15400 (16) 7000 (16)	16800 (18) 7600 (18)	18200 (20) 8250 (20)	- -
30.5L-32	20/26/32	14700 (12) 6650 (12)	16400 (16) 7450 (16)	18500 (20) 8400 (20)	20000 9000	22000 (26) 10000 (26)	24700 (32) 11200 (32)
35.5L-32	20/26/30	19500 (16) 8850 (16)	22500 (20) 10200 (20)	24600 11200	27000 (26) 12150 (26)	29100 (30) 13200 (30)	- -

MS933

High flotation tires used in agricultural, logging and off-the-road surface. Maximum speed 30mph (50km/h) - speed symbol B

Size	PR	Tire Load Limits at Various Cold Inflation Pressures								
psi		15	20	25	30	35	40	45	50	55
kPa		100	140	170	210	240	280	310	345	380
66x43.00-25	20	7400 (6)	8800 (8)	9900 (10)	11000 (12)	12300 (14)	13200 (16)	13900	14800 (20)	-
		3350 (6)	4000 (8)	4500 (10)	5000 (12)	5600 (14)	6000 (16)	6300	6700 (20)	-
66x43.00-26	20	7400 (6)	8800 (8)	9900 (10)	11000 (12)	12000 (14)	13200 (16)	13900	14800 (20)	-
		3350 (6)	4000 (8)	4500 (10)	5000 (12)	5450 (14)	6000 (16)	6300	6700 (20)	-
67x34.00-25	20	7400	8800 (6)	10200 (8)	11400 (10)	12300 (12)	13200 (14)	14070	15080	16100 (20)
		3350	4000 (6)	4625 (8)	5150 (10)	5600 (12)	6000 (14)	6380	6840	7300 (20)
67x34.00-26	20	7400	8800 (6)	10200 (8)	11400 (10)	12300 (12)	13200 (14)	14070	15080	15700 (20)
		3350	4000 (6)	4625 (8)	5150 (10)	5600 (12)	6000 (14)	6380	6840	7100 (20)
73x44.00-32	20	8550	10200	11700	12800 (12)	14300	15200 (16)	16500	17600 (20)	-
		3875	4625	5300	5800 (12)	6500	6900 (16)	7500	8000 (20)	-
73x50.00-32	20	8800	10500	12000	13200	14800 (16)	15700	17100 (20)	-	-
		4000	4750	5450	6000	6700 (16)	7100	7750 (20)	-	-

Load and Inflation Pressure Charts

MS910R

Construction application

Size		Service Speed	Tire Load Limits at Various Cold Inflation Pressures							
psi			30	33	36	40	44	47	51	54
kPa			200	225	250	275	300	325	350	375
335/80R18	L	5mph	-	4740	5050	5340	5620	5890	6150	6400
		10kph	-	2150	2290	2420	2550	2670	2790	2900
	E	30mph	3240	3460	3680	3900	4100	4300	4500	4680
		50kph	1470	1570	1670	1770	1860	1950	2040	2120
365/70R18	L	5mph	-	4920	5230	5510	5800	6090	6350	6000
		10kph	-	2230	2370	2500	2630	2760	2880	3000
	E	30mph	3330	3570	3790	4010	4210	4410	4610	4800
		50kph	1510	1620	1720	1820	1910	2000	2090	2180
405/70R18	L	5mph	-	5980	6350	6700	7060	7410	7740	8050
		10kph	-	2710	2880	3040	3200	3360	3510	3650
	E	30mph	3920	4210	4480	4740	4980	5230	5450	5680
		50kph	1780	1910	2030	2150	2260	2370	2470	2575
335/80R20	L	5mph	-	5030	5360	5640	5950	6240	6500	6800
		10kph	-	2280	2430	2560	2700	2830	2950	3075
	E	30mph	3420	3660	3900	4120	4340	4540	4740	4940
		50kph	1550	1660	1770	1870	1970	2060	2150	2240
365/80R20	L	5mph	-	5980	6350	6700	7060	7410	7740	8050
		10kph	-	2710	2880	3040	3200	3360	3510	3650
	E	30mph	3920	4210	4480	4740	4980	5230	5450	5680
		50kph	1780	1910	2030	2150	2260	2370	2470	2575
405/70R20	L	5mph	-	6330	6750	7120	7500	7850	8200	8550
		10kph	-	2870	3060	3230	3400	3560	3720	3875
	E	30mph	4170	4450	4740	5000	5270	5530	5780	6000
		50kph	1890	2020	2150	2270	2390	2510	2620	2725
405/70R24	L	5mph	-	6950	7390	7800	8220	8620	9000	9350
		10kph	-	3150	3350	3540	3730	3910	4080	4250
	E	30mph	4590	4920	5230	5510	5800	6090	6350	6600
		50kph	2080	2230	2370	2500	2630	2760	2880	3000
455/70R24	L	5mph	-	8420	8950	9480	9970	10450	10910	11400
		10kph	-	3820	4060	4300	4520	4740	4950	5150
	E	30mph	5730	6130	6530	6900	7250	7610	7940	8250
		50kph	2600	2780	2960	3130	3290	3450	3600	3750

Multipurpose radial

Size		Service Speed	Tire Load Limits at Various Cold Inflation Pressures								
psi			36	44	51	54	65	73	80	87	94
kPa			250	300	350	375	450	500	550	600	650
335/80R18	MPT	70mph	3320	3840	4400	-	-	-	-	-	-
		110kph	1500	1740	2000	-	-	-	-	-	-
365/70R18	MPT	70mph	3280	3790	4200	4540	-	-	-	-	-
		110kph	1490	1720	1900	2060	-	-	-	-	-
385/55R18	MPT	70mph	3380	3850	4270	4790	5200	-	-	-	-
		110kph	1530	1750	1940	2170	2360	-	-	-	-
335/80R20	MPT	70mph	3480	3970	4400	4940	5360	5820	6260	6720	7150
		110kph	1580	1800	2000	2240	2430	2640	2840	3050	3250
365/80R20	MPT	70mph	3810	4400	5050	5690	5220	6550	7080	7580	7850
		110kph	1730	2000	2290	2580	2730	2970	3210	3440	3550
405/70R20	MPT	70mph	3770	4360	4940	5640	6220	6770	7300	7850	-
		110kph	1710	1980	2240	2560	2820	3070	3310	3550	-
405/70R24	MPT	70mph	4560	5270	5970	6530	7320	7850	-	-	-
		110kph	2070	2390	2710	2960	3320	3550	-	-	-
455/70R24	MPT	70mph	5690	6570	7430	8250	-	-	-	-	-
		110kph	2580	2980	3370	3750	-	-	-	-	-

INTERNATIONAL LOAD INDEX & SPEED SYMBOLS

Load Index Numbers		
LI	KG	LBS
90	600	1320
91	615	1360
92	630	1390
93	650	1430
94	670	1480
95	690	1520
96	710	1570
97	730	1610
98	750	1650
99	775	1710
100	800	1760
101	825	1820
102	850	1870
103	875	1930
104	900	1980
105	925	2040
106	950	2090
107	975	2150
108	1000	2200
109	1030	2270
110	1060	2340
111	1090	2400
112	1120	2470
113	1150	2540
114	1180	2600
115	1215	2680
116	1250	2760
117	1285	2830
118	1320	2910
119	1360	3000
120	1400	3080
121	1450	3200
122	1500	3300
123	1550	3420
124	1600	3520
125	1650	3640
126	1700	3740
127	1750	3860
128	1800	3960
129	1850	4080
130	1900	4180
131	1950	4300
132	2000	4400
133	2060	4540
134	2120	4680

Load Index Numbers		
LI	KG	LBS
135	2180	4800
136	2240	4940
137	2300	5080
138	2360	5200
139	2430	5360
140	2500	5520
141	2575	5680
142	2650	5840
143	2725	6000
144	2800	6150
145	2900	6400
146	3000	6600
147	3075	6800
148	3150	6950
149	3250	7150
150	3350	7400
151	3450	7600
152	3550	7850
153	3650	8050
154	3750	8250
155	3875	8550
156	4000	8800
157	4125	9100
158	4250	9350
159	4375	9650
160	4500	9900
161	4625	10200
162	4750	10500
163	4875	10700
164	5000	11000
165	5150	11400
166	5300	11700
167	5450	12000
168	5600	12300
169	5800	12800
170	6000	13200
171	6150	13600
172	6300	13900
173	6500	14300
174	6700	14800
175	6900	15200
176	7100	15700
177	7300	16100
178	7500	16500
179	7750	17100

Load Index Numbers		
LI	KG	LBS
180	8000	17600
181	8250	18200
182	8500	18700
183	8750	19300
184	9000	19800
185	9250	20400
186	9500	20900
187	9750	21500
188	10000	22000
189	10300	22700
190	10600	23400
191	10900	24000
192	11200	24700
193	11500	25400
194	11800	26000
195	12150	26800
196	12500	27600
197	12850	28300
198	13200	29100
199	13600	30000
200	14000	30900
201	14500	32000
202	15000	33100
203	15500	34200
204	16000	35300
205	16500	36400
206	17000	37500
207	17500	38600
208	18000	39700
209	18500	40800
210	19000	41900
211	19500	43000
212	20000	44100
213	20600	45400
214	21200	46700
215	21800	48100
216	22400	49400
217	23000	50700
218	23600	52000
219	24300	53600
220	25000	55100
221	25750	56800
222	26500	58400
223	27250	60000
224	28000	61500

Load Index Numbers		
LI	KG	LBS
225	29000	64000
226	30000	66000
227	30750	68000
228	31500	69500
229	32500	71500
230	33500	74000
231	34500	76000
232	35500	78500
233	36500	80500
234	37500	82500
235	38750	85500
236	40000	88000
237	41250	91000
238	42500	93500
239	43750	96500
240	45000	99000
241	46250	102000
242	47500	104500
243	48750	107500
244	50000	110000
245	51500	113500
246	53000	117000
247	54500	120000
248	56000	123500
249	58000	128000
250	60000	132500
251	61500	135500
252	63000	139000
253	65000	143500
254	67000	147500
255	69000	152000
256	71000	156500
257	73000	161000
258	75000	165500
259	77500	171000
260	80000	176500
261	82500	182000
262	85000	187500
263	87500	193000
264	90000	198500
265	92500	204000
266	95000	209500
267	97500	215000
268	100000	220500
269	103000	227000

Speed Symbols		
Speed Symbol	Speed Category	
	km/h	MPH
A1	5	2.5
A2	10	5
A3	15	10
A4	20	12.5
A5	25	15
A6	30	20
A7	35	22.5
A8	40	25
B	50	30

Speed Symbols		
Speed Symbol	Speed Category	
	km/h	MPH
C	60	35
D	65	40
E	70	43
F	80	50
G	90	55
J	100	62
K	110	68
L	120	75

MAXAM OTR TIRE LIMITED WARRANTY

LIMITED WARRANTY

The following warranty contains certain rights and obligations that pertain to MAXAM branded Off-The-Road (OTR), Industrial, Construction, Bias Agricultural, large Mining tires and Forestry tires. Please review these rights and obligations carefully.

DEFINITION

This Limited Warranty covers all MAXAM branded Off-The-Road (OTR), Industrial, Construction, large Mining tires, Bias Agricultural and Forestry tires as designated in MAXAM OTR and AG product listings (price books, catalogs and leaflets). This does not apply to used, DA, or "NA" (not adjustable) tires.


ELIGIBILITY

Every tire bearing the name MAXAM and with a complete serial number moulded in the side-wall is warranted to be free from manufacturing defects within the manufacturer's control. If an examination by an authorized MAXAM representative shows that any such tire failed as a result of manufacturing defects, it will, at the option of MAXAM, either be repaired at no charge, or a credit will be issued toward the purchase price of a replacement tire, being a comparable MAXAM OTR product. This credit will be determined by applying the lesser of the percentage of remaining tread depth (RTD%) and the maximum age based credit shown in the following chart. The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of credit to be applied. Customer is responsible for the disposal of all adjusted tires. This warranty coverage is for tires used within published designed specifications for MAXAM tires. To be eligible for warranty, the tire must have at least 5/32nds (4mm) of remaining tread. The customer will make any claimed tire available for inspection or will coordinate with MAXAM for return shipment to MAXAM upon request. If return shipment is requested, MAXAM will bear all shipping costs and provide Return Goods Authorization and arrange pickup. Any use outside such specifications automatically voids this warranty. Please consult MAXAM technical leaflets, etc. for design specifications.

TIME PERIOD

This warranty applies for a maximum period of five years (60 months) from date of tire purchase. If no invoice or documentation of the tire purchase can be provided, the date of tire manufacture will be used. The date of manufacture can be determined by the first six digits in the serial number code.

AMOUNT OF CREDIT TO CUSTOMER FOR MANUFACTURING DEFECTS

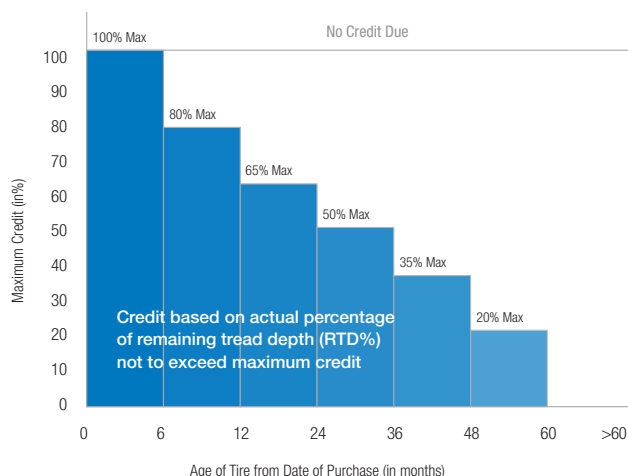

LIMITATIONS

This Limited Warranty is applicable to the original purchaser and is not assignable to subsequent purchasers. No MAXAM dealer, agent, or representative has the authority to make or imply any representation, promise or agreement which in any way varies or extends the terms of this warranty. Any tire, no matter how well manufactured, may fail in service or become un-serviceable due to conditions beyond the control of the manufacturer. This Limited Warranty is under no circumstances a representation that a tire failure cannot occur. This limited warranty gives you specific rights and you may also have other rights which may vary from jurisdiction to jurisdiction. To the extent that the provisions of any applicable legislation expressly replace, eliminate, amend or prohibit any term or terms contained herein, such term or terms shall be accordingly replaced, eliminated, amended or extended, as the case may be, in accordance with such legislation.

LIMITED WARRANTY EXCLUSIONS ALL OTR TIRES AND TUBES

All OTR/AG warranties are subject to the following exclusions:

1. Tire claims submitted more than 60 months from the date of purchase.
2. Tires for which alternative warranties or guarantees have been negotiated.
3. Tires with less than 5/32nds (4mm) remaining tread depth.
4. Tire used under chains. MAXAM does recognize that in many applications tire chains provide enhanced tire protection and may extend tire life. In these cases, MAXAM may extend special negotiated warranties. Please consult your MAXAM representative for details.
5. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, overloading, running flat, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical action, fire or other externally generated heat, use of studs, water or other material entrapped inside the tire, vehicle damage or road hazards (such as rock cuts, punctures, cut separations, impacts, flex breaks).
6. Claims for irregular wear or rapid tread wear are not covered by this limited warranty.
7. Any tire which is operated above its Ton-Mile per Hour (TMPH) or Tonne-Kilometer per Hour (TKPH) rating.
8. Tires mounted with tubes or o-rings not approved by MAXAM.
9. Repaired or retreaded tires.
10. Any modifications to the tire (added buttress shoulders, re-grooving, re-lugging, etc.) void all warranties.
11. Any material added to the tire (tire fill, sealer, balancer, etc.) is not covered by this limited warranty and will not be compensated for in case of credit being issued for the tire.
12. Use of a solid type fill (such as urethane) voids all warranties.
13. Any costs associated with the repair of tires are not covered unless previously approved by MAXAM.
14. Costs of mounting and balancing following pro-rated replacement or repair of tires or tubes and applicable federal, state, provincial and local taxes, are not covered under this warranty.
15. Cost of disposal of warranted tires. Disposal of tires is the sole responsibility of the customer.
16. All other warranties, including the implied warranties of merchantability and fitness for a particular purpose, are expressly disclaimed to the extent permitted by law.
17. ALL OBLIGATIONS OR LIABILITIES FOR INDIRECT, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGE ARE HEREBY EXCLUDED TO THE EXTENT PERMITTED BY LAW, INCLUDING ECONOMIC LOSS, LOSS OF PROFIT, LOSS OF USE OF VEHICLE, LOSS OF TIME, PERSONAL INJURY OR DEATH.

TO OBTAIN WARRANTY SERVICE

1. Contact an authorized MAXAM dealer or representative. Please be prepared to provide proof of purchase of the product, purchase date and serial number.
2. The authorized dealer or representative will contact MAXAM to arrange the inspection of the tire in question and processing of your claim. The dealer has no authority or responsibility to make the determination as to eligibility for coverage under this warranty.

V.919



MAXAM TIRE NORTH AMERICA INC.

300 Rosewood Drive, Suite 102
Danvers, MA 01923, USA
T:1-844-MAXAM-NA | F:978-560-0624

MAXAM INTERNATIONAL LIMITED

Grosser Hasenpfad 30
D-60598
Frankfurt am
Main, Germany

WWW.MAXAMTIRE.COM

DB.22